

Sinkron

JURNAL DAN PENELITIAN TEKNIK INFORMATIKA

Volume 6 | Number 1 | October 2021

Dipublikasi oleh :

POLITEKNIK
GANESHA
Medan

SERTIFIKAT

Kementerian Riset dan Teknologi/
Badan Riset dan Inovasi Nasional



Petikan dari Keputusan Menteri Riset dan Teknologi/
Kepala Badan Riset dan Inovasi Nasional

Nomor 148/M/KPT/2020

Peringkat Akreditasi Jurnal Ilmiah Periode II Tahun 2020

Nama Jurnal Ilmiah

Sinkron : Jurnal dan Penelitian Teknik Informatika

E-ISSN: 25412019

Penerbit: Politeknik Ganesha Medan

Ditetapkan sebagai Jurnal Ilmiah

TERAKREDITASI PERINGKAT 3

Akreditasi Berlaku selama 5 (lima) Tahun, yaitu
Volume 4 Nomor 2 Tahun 2020 sampai Volume 9 Nomor 1 Tahun 2025

Jakarta, 03 Agustus 2020

Menteri Riset dan Teknologi/
Kepala Badan Riset dan Inovasi Nasional
Republik Indonesia,



Bambang P. S. Brodjonegoro
Bambang P. S. Brodjonegoro

Table of Contents

Arjuna Accretitation Certificate

Table of Contents

TOPSIS method application in choosing the Most-Sale POS cashier machines and tools Rani Irma Handayani, Normah Normah, Deni Wironoto	1-12
Sustainability of Implementing Enterprise Architecture in the Solar Power Generation Manufacturing Industry Djarot Hindarto, R. Eko Indrajit, Erick Dazki	13-24
Data Mining using K-means method for feasibility selection of Non-cash food Assistance recipients in the Era of Covid-19 Rusdiansyah Rusdiansyah, Hendra Supendar, Tuslaela Tuslaela	25-33
Decision Support System for Millennial Generation Softskill Competency Assessment using AHP and Eliminate Promethee Method Akmaludin Akmaludin, Erene Gernaria Sihombing, Linda Sari Dewi, Rinawati Rinawati, Ester Arisawati	34-43
Selection of the Best Swimming Athletes using MCDM-AHP and VIKOR Methods Akmaludin Akmaludin, Sidik Sidik , Nandang Iriadi, Andi Arfian, Adhi Dharma Surianto	44-52
Bot to Monitor Student Activities On E-Learning System Based On Robotic Process Automation (RPA) Ghifari Munawar	53-61
Prediction Models with Machine Learning Against Student Success in Online Learning Yennimar, Rohni Endetta Manihuruk, Etis Landya Br Hotang	62-68
TF-IDF Method and Vector Space Model Regarding the Covid-19 Vaccine on Online News Bitu Parga Zen, Irwan Susanto, Dian Finaliamartha	69-79
Algoritma C4.5 in mapping the admission patterns of new Students in Engineering Computer Data Mining Yunita Sari Siregar, Boni Oktaviana Sembiring, Hasdiana Hasdiana, Arie Rafika Dewi, Herlina Harahap	80-90
Bayesian Pixel Density Estimation Modeling to Detect Human Sperm Sample Image Based on Sperm Head Shape Candra Zonyfar, Kiki Ahmad Baihaqi	91-99
Classification of the Human Development Index in Indonesia Using the Bootstrap Aggregating Method Noor Ell Goldameir, Anne Mudya Yolanda, Arisman Adnan, Lusi Febrianti	100-106
Design and Build a Multilevel Mace Nutmeg Dryer to Improve the People's Economy Ihsan Ihsan, Dirja Nur Ilham, Reza Ade Putra, Rudi Arif Candra, Arie Budiansyah	107-112

Solo City Batik Design Security System (SiKemTi Solo) During the Pandemic Covid-19 Inggris
Jani Kusanti, Ramadhian Agus Triono Sudalyo 113-119

Application of the C4.5 Algorithm on the Effect of Watching Youtube Videos On the Development of Early Childhood Creativity
Ita Dewi Sintawati, Widiarina Widiarina, Kartika Mariskhana 120-126

Identification of Face Mask With YOLOv4 Based on Outdoor Video
Mawaddah Harahap, Leonardo Kusuma, Melva Suryani, Candra Ebenezer Situmeang, Juniven Francisco Purba 127-134

Clustering Algorithm For Determining Marketing Targets Based Customer Purchase Patterns And Behaviors
Amir Mahmud Husein , Februari Kurnia waruwu , Yacobus M.T. Batu Bara , Meleyaki Donpril, Mawaddah Harahap 137-143

Railroad traffic light sensors to anticipate jams at junctions based on ATmega8
Amir Mahmud Husein, Alfredy Willim, Yandi Tumbur Nainggolan, Antonius Moses Simanggungsong, Prayoga Banjarnahor 144-156

Selection of the Best Swimming Athletes using MCDM-AHP and VIKOR Methods

Akmaludin^{1)*}, Sidik²⁾, Nandang Iriadi³⁾, Adhi Dharma Surianto⁴⁾, Andi Arfian⁵⁾

^{1,2,5)} Universitas Nusa Mandiri, Jakarta, Indonesia

^{3,4)} Universitas Bina Sarana Informatika, Jakarta, Indonesia

¹⁾akmaludin.akm@nusamandiri.ac.id, ²⁾sidik.sdk@nusamandiri.ac.id, ³⁾nandang.ndn@bsi.ac.id

⁴⁾adhi.ais@bsi.ac.id, ⁵⁾andi.afn@nusamandiri.ac.id

Submitted : May 22, 2021 | **Accepted :** June 22, 2021 | **Published :** Oct 8, 2021

Abstract: The process of selecting the best swimming athletes is carried out in several test stages. The first is the ability in the four basic swimming styles often contested in international competitions. The second test is the basic physical abilities possessed by a number of swimming athletes. The tests related to the swimming style consist of breaststroke swimming, butterfly swimming, backstroke swimming and crawl stroke swimming, while the plyometrics test consists of banded knee jump, squat jump, jump to the side, and dept jump; due to a large number of selections, a test is required for every athlete. The purpose of this selection is to find the best swimming athletes who will be competed in the international swimming class event. The nine athletes of the Millenium aquatic swimming club that were selected previously are the forerunners of the selected swimming athletes and will be evaluated on a representative basis, which is the best among the nine athletes. The method used in the evaluation and selection process uses two continuous methods, namely the AHP and VIKOR methods. From the results selection assessment, it was found that the best three of the nine nominations selected, the first position selected was AT2 with an index 0.00, the second position was AT8 with an index 0.25, and the third position was AT7 with an index 0.61. Thus it can be concluded that the AHP and VIKOR methods can be used as decision support to determine optimally in the optimal selection process for swimming athletes.

Keywords: Athlete, AHP, Plyometrics, Swimming style, VIKOR.

INTRODUCTION

Every swimming athlete must often do plyometrics test exercises, and plyometrics is a form of high-intensity training that aims to increase strength and speed towards building power in swimming athletes (Pendidikan & Dan, 2016). Plyometrics can be done by anyone and can build strength in the leg muscles. Techniques that can be done are the bended knee jump, squat jump, side jump, and dept jump (Shava et al., 2017). This is done to create power, especially in breaststroke swimming. Another important aspect is the starting technique, in which the coaches do not forget how to treat a good start so as to give strong resistance to starting competitions in swimming. The starting technique will build a strong power in the start box. There are several ways to start, namely racing start, swim start, grab start, and tract start (Rasyid et al., 2017). In swimming exercises, you will get used to starting with the help of leg muscles and arm muscles explosively, where the two-leg muscles and arm muscles that are combined will give an explosion against repulsion at start, thus the speed will increase and have a high effect on speed in swimming.

For prepare for the competition in the international event arena, swimming athletes are strived to diligently do exercises on muscle strength both for the leg muscles and hand muscle strength; this is the reason for achieving victory in every competition for swimming athletes, so it is necessary to do serious training to get the expected victory for representatives especially for athletes in the millennium aquatic swimming club. Muscles, indeed legs are very important to be learned by swimming athletes so this plyometrics exercise has a very strong influence on all swimming styles that are used (Annisa, 2020). there is. So that the purpose of this paper is to carry out a selection process for the nine swimming athletes at the Millennial Aquatic Swimming Club, through the application of leg muscle strength tests with the application of the four swimming styles that are contested (Priana, 2019). The measuring instruments used include microtois, stopwatches, and writing instruments. The distance traveled which is the test material is for a distance of 50 meters for the four swimming styles. The results are recorded for data analysis using the Analyze Hierarchical Process (AHP) method associated with the VIKOR method (Wibawa et al., 2019), (Dincer & Hacıoglu, 2013). These two methods are groups of Multi-Criteria Decision Making (MCDM) and have the same role in both methods, namely for the selection process and

*name of corresponding author



This is an Creative Commons License This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License.

evaluation of all processes and activities that indicate ranking (Thipparat & Thaseepetch, 2013), thus both AHP and VIKOR methods can collaborate into a single method that can deal with problems related to the selection process for swimming athletes (Yang et al., 2017) for all swimming styles that are often competed in national and international high-level competitions, especially regarding existing swimming style variants.

LITERATURE REVIEW

Multi-criteria Decision Making-Analytic Hierarchical Process (MCDM-AHP)

Analytic Hierarchical Process (AHP) is a method used to solve problems that are qualitative and quantitative and can even handle problems that are a combination of the two (Brugha, 2004). AHP that will be used is AHP which is Multi-Criteria (Saaty, 2008), which means that the problem uses many criteria. This is what makes it difficult to determine the priority of many of these criteria (Thipparat & Thaseepetch, 2013). Therefore, all complicated problems must be simplified by using the hierarchy model (Brugha, 2004), because, with this hierarchy, it will be easier and simpler to determine the weight of each of a number of alternatives based on a number of criteria used as a barometer of measurement (Velasquez & Hester, 2013) (Ishizaka & Labib, 2011). Each hierarchy will provide a value called an eigenvector, of course, the eigenvector, which is applied using the Multi-Criteria Decision Making (MCDM) method is of course to get the optimal eigenvector (Alonso & Lamata, 2006), (Dincer & Hacıoglu, 2013). The optimal eigenvector is the provision of a value for the eigenvector that does not have a difference to the last eigenvector with the previous eigenvector value that has gone through the iteration stage in multiplying pairwise matrices in each hierarchy level. Multiplication of matrices can be done by squaring pairwise matrices (1) with the same matrices, and the results will be stored in certain matrices, then the resulting material must be squared, and the results will be saved in certain matrices. The two certain matrices will be processed by determining normalization to get the eigenvector value. If there is a difference between the two, then multiplication must be done again from the second particular matrices and so on until you find the optimal eigenvector value. To get the optimal eigenvector value, of course, you will go through the iteration stage in multiplying pairwise matrices. Several formulations that can be used with the MCDM-AHP method are determining pairwise matrices, which are arranged based on the hierarchical model created (Ghaleb et al., 2020). The pairwise matrices that are set must follow the rules of Thomas L. Saaty with an order that is adjusted to the value of the Random Index (RI). Note that the RI table that is applied in table-1 has been determined internationally, the amount of which is adjusted to each order of the matrices. Previously there are several important things to determine the consistency of the final result whether a temporary decision is acceptable or not, namely by looking for the Consistent Index (CI) in (2) combined with the Random Index value to obtain the Consistency Ratio (CR) applied to (3) (The et al., 1936). The results obtained through the calculation of mathematical algebraic matrices can be tested using the expert choice application .

$$M_{(r,s)} = \begin{bmatrix} x_{(1,1)} & x_{(1,2)} & x_{(1,3)} & \dots & x_{(1,s)} \\ x_{(2,1)} & x_{(2,2)} & x_{(2,3)} & \dots & x_{(2,s)} \\ x_{(3,1)} & x_{(3,2)} & x_{(3,4)} & \dots & x_{(3,s)} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ x_{(r,1)} & x_{(r,2)} & x_{(r,3)} & \dots & x_{(r,s)} \end{bmatrix} \quad (1)$$

$$CI = \frac{(\lambda \max - n)}{(n-1)} \quad (2)$$

$$CR = \frac{CI}{RI} \quad (3)$$

Table 1
Random Index

Ordo	1	2	3	4	5	6	7	8	9	10
RI	0.00	0.00	0.58	0.90	1.12	1.24	1.32	1.41	1.45	1.48

*name of corresponding author



This is an Creative Commons License This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License.

VIKOR

VIKOR is a method that can be used for ranking selection using the index system (Umar & Samir, 2019), where the highest rank is determined by the smallest index magnitude or zero value. The VIKOR method applies the concept of elimination which is very different from the others, and the VIKOR method emphasizes the indexed system. Where is the indexed system, which is ascending index, by determining the amount of determination of the index at the accumulation stage (Mardani et al., 2016), (Ramezaniyan et al., 2012). In the process, the VIKOR method has fairly simple stages, but only at the S_i and R_i acquisition stages, where these dimensions will be used after the normalization stage has been carried out on the dataset. The obstacle that often occurs is understanding in determining the criteria on the dataset because each criterion in the dataset has two basic understandings where many researchers assume that all data are the same, even though they are not. There is a criterion that has an inverse meaning that the smallest is the best. This can happen in terms of time. As is the case in this study, to calculate the fastest athlete in the calculation of time, of course, the athlete who has the smallest time value that describes the fastest athlete in the swimming race, so this will be a determination that the smallest value seen on the stopwatch is the best. In general, the greatest value is the best value. So that the normalization that is carried out is of course also different from the others. Agree that there are two assessment assumptions, namely 1) the largest value is the best and pay attention 4) which explains that the largest value is the best, and 2) the smallest value is the best value and pay attention (5) which explains that the smallest value is the best value. This study will apply both understandings. These two things must distinguish in the normalization process of each row of data, this is so that they have the same meaning that is parallel. If you use the amount of comparison for each criterion, determine it first by multiplying it according to the importance value of each criterion by the dimension v listed in (6). In the process of determining the maximum value dimensioned by S_i , pay attention (7) and the maximum magnitude of each row of normalized data R_i from each row in determining it (Sasanka & Ravindra, 2015), pay attention (8).

$$H_{(i,j)} = \frac{(A_{(i,j)} - A'_{(j)})}{(A^*_{(j)} - A'_{(j)})} \quad (4)$$

$$L_{(i,j)} = \frac{(A_{(i,j)} - A^*_{(j)})}{(A'_{(j)} - A^*_{(j)})} \quad (5)$$

$$v = R_i * W \quad (6)$$

$$S_i = \sum_{j=1}^n W_j R_{(i,j)} \quad (7)$$

$$R_i = \max_j [W_j \times R_{(i,j)}] \quad (8)$$

$$Q_i = \left[\frac{S_i - S'}{S^* - S'} \right] \times V + \left[\frac{R_i - R'}{R^* - R'} \right] \times (1 - V) \quad (9)$$

For every dataset that has been determined S_i amount and R_i amount, of course, it will be easy to determine the smallest value of each amount and the largest value of each amount of line. it is also easy to determine the smallest value of the maximum every line and also the largest value of the maximum of each line. that can last determine index value amount on the overall data with the value of v can be determined based on certain provisions or use the same comparison of fifty percent of each amount. So that index Vikor will be easily according to the formula listed in (9).

METHOD

In the VIKOR method, it can be described in a simple way to be able to understand and understand the processes, there are several stages that are explained step by step, and this can be said to be an algorithm for using the VIKOR method (Haji et al., 2019). These stages involve using the VIKOR method in detail and in detail through the stages listed in fig.1. Step by step is explained in stages and what is unique in the VIKOR algorithm is the separation process between understanding the largest value is the best, and the smallest value is the best; this is done so that the unification process must be normalized first so that the calculation process can be done with one angle. View the same or in line. Thus the normalization process can be carried out easily to produce a good integration into normalization. Thus the normalization table will be formed into a complete unit and ready to be processed in the calculation of the VIKOR method until the final determination of the ranking process, in

*name of corresponding author



This is an Creative Commons License This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License.

determining the weight with normalization data, calculating the value of R_i , calculating the value of S_i to determining the amount of the value of Q_i .

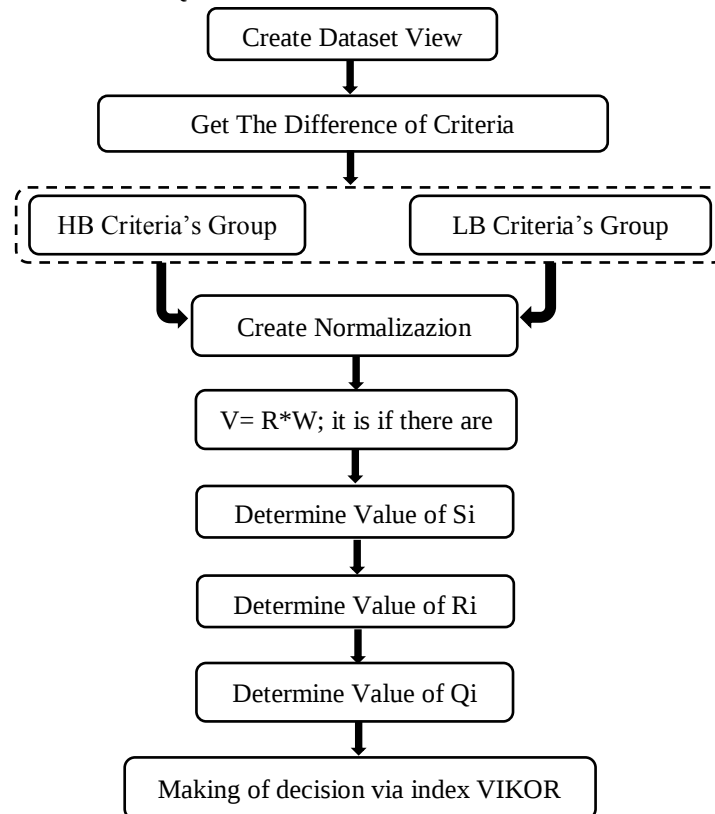


Fig. 1. VIKOR Algorithm.

RESULT

Departing from the establishment of a dataset view which is a snippet of swimming athletes at the Millennial Aquatic Swimming Club who developed techniques in four swimming styles that are based on the development of leg muscles and hand muscles, into a unique study in increasing the explosion that provides a strong thrust in each. Swimming style. Of the nine athletes who were candidates for swimming style athletes with measurements using tools such as microtoise, stopwatch, and writing instruments to record the results for each swimming stroke with a special distance of 50 meters. The measurement taken is plyometrics, which is a form of high-intensity training that aims to increase strength and speed towards power building for each swimming athlete. Testing is done by taking four swimming styles, namely freestyle, breaststroke, backstroke and butterfly stroke, plus four plyometrics techniques, namely banded knee jump, squat jump, jump to the side, and dept jump. This will be applied with a combination method between AHP and VIKOR, of course, with the conditions listed in table-2, while the results obtained are described in a dataset view, pay attention table-3. Several things need to be considered in Fig. 2 with an explanation of the criteria for the following criteria:

Table 2
Roof of criteria

Acronim	Criteria	Category
GB	Crawl stroke (CS)	LB
GD	Breast stroke (BS)	LB
GK	Butterfly strok (BT)	LB
GP	Back crawl (BC)	LB
BJ	Banded Knee Jump (BJ)	HB
SJ	Squat Jump (SJ)	HB
JS	Jump to Side (JS)	HB
DJ	Dept Jump (DJ)	HB

*name of corresponding author



This is an Creative Commons License This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License.

While the dataset view generated from nine athletes provides a detailed description of the results of the acquisition of microtois and stopwatch with the results shown in (table-3) but (table 4) as a form of normalization of the dataset view. To determine the importance value of the four swimming styles and leg muscle strength with plyometrics, it is assisted by determining each of its important values with the help of the Analytic Hierarchy Process (AHP) method. In this case, it is divided into two parts, namely, to determine the importance value of the four swimming styles and the importance value for testing with plyometrics. This is done to determine the importance value of each criterion. Note (table-5) which is a pairwise matrix of four swimming styles processed using algebra matrices mathematically, the calculation results occur in five iteration stages to get the optimal eigenvector value, as for the final results obtained for the value λ max, optimal eigenvector, consistency index, and the consistency ratio can be seen in (table-5) and included with the eigenvector value calculation using the expert choice application in (figure-2), whereas to determine the importance value related to the plyometrics results with the four criteria used can be seen in (Table-6) with a total of five iterations to get the optimal eigenvector value using algebra matrices mathematically and included with the eigenvector value calculation using the expert choice application in (figure-3).

Table 3
Dataset View

Criteria	CS	BS	BT	BC	BJ	SJ	JS	DJ
(Alt)	(LB)	(LB)	(LB)	(LB)	(HB)	(HB)	(HB)	(HB)
AT1	80.96	72.66	78.52	79.77	35	22	43	30
AT2	97.92	80.88	84.57	73.54	27	24	35	34
AT3	73.76	77.16	82.83	75.15	32	31	42	31
AT4	68.32	76.32	83.50	82.78	25	26	29	27
AT5	81.28	75.90	73.54	75.78	37	32	36	26
AT6	89.68	61.32	88.71	66.75	33	28	32	32
AT7	82.08	69.12	89.89	60.66	28	33	35	28
AT8	88.40	69.36	77.46	73.75	31	25	28	30
AT9	82.80	61.92	73.54	75.01	32	30	34	32

Table 4
Normalization

Type	GB	GD	GK	GP	SU	PU	SJ	PU
Criteria	(LB)	(LB)	(LB)	(LB)	(HB)	(HB)	(HB)	(HB)
(Alt)	0.42	0.29	0.17	0.11	0.38	0.28	0.20	0.13
AT1	0.57	0.42	0.30	0.86	0.83	0.00	1.00	0.50
AT2	0.00	0.00	0.67	0.58	0.17	0.18	0.47	1.00
AT3	0.82	0.19	0.57	0.66	0.58	0.82	0.93	0.63
AT4	1.00	0.23	0.61	1.00	0.00	0.36	0.07	0.13
AT5	0.56	0.25	0.00	0.68	1.00	0.91	0.53	0.00
AT6	0.28	1.00	0.93	0.28	0.67	0.55	0.27	0.75
AT7	0.54	0.60	1.00	0.00	0.25	1.00	0.47	0.25
AT8	0.32	0.59	0.24	0.59	0.50	0.27	0.00	0.50
AT9	0.51	0.97	0.00	0.65	0.58	0.73	0.40	0.75

Table 5
Eigenvector swimming style using algebra matrices

Swimming Style	BS	BT	BC	CS	Eigenvector
Breast Stroke (BS)	1.000	1.632	2.760	3.000	0.424
Butterfly Stroke (BT)	0.613	1.000	1.823	2.852	0.294
Back Crawl (BC)	0.362	0.549	1.000	1.802	0.170
Crawl Stroke (CS)	0.333	0.351	0.555	1.000	0.112
λ max=	4.030	CI=	0.010	CR=	0.011

*name of corresponding author



This is an Creative Commons License This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License.

Priorities with respect to:
Goal: Swimming style pairwise ...



Fig. 2. Eigenvector swimming style using expert choice application

Table 6
Eigenvector plyometrics using algebra matrices

Plyometrics	BJ	SJ	JS	DJ	Eigenvector
Banded Knee Jump (BJ)	1.000	1.636	1.895	2.437	0.384
Squat Jump (SJ)	0.611	1.000	1.745	2.039	0.282
Jump to Side (JS)	0.528	0.573	1.000	1.798	0.199
Dept Jump (DJ)	0.410	0.490	0.556	1.000	0.134
λ max=	4.035	CI=	0.012	CR=	0.013

Priorities with respect to:
Goal: Plyometrics pairwise



Fig. 3. Eigenvector plyometrics using the expert choice application.

The development of the view dataset must be determined in advance in the form of normalization, which will provide an overview of each data being in the right position within its respective range. The normalization table can be obtained with the help (Equation-4) and (Equation-5), which is shown in (Table-4). With the second help (Table-5) and (Table-6) so that each value of importance to pairwise matrices on swimming style and plyometrics results using the help of the mathematical algebra matrices process, provides a sign for determining the amount of weight for each dataset view that is must be multiplied by each eigenvector value for each criterion and the results obtained from this multiplication can be seen in (Table-7). That what is seen in (Table-7) is a result of complexity containing each criterion which is equipped with the meaning of each group of criteria consisting of the swimming style group and the importance value of the plyometrics which have been proven by their respective importance values, thus (Table- 7) has described the overall collaboration of the two methods, namely the Analytic Hierarchy Process (AHP) method and the VIKOR method, which are only partially seen in the table. The basis for determining the VIKOR index is clear; using a number of formulas above can be applied in determining the VIKOR index based on (Table-7) below. The steps taken using the VIKOR algorithm are very simple to perform calculations according to the VIKOR algorithm stages. The first step is to determine the magnitude of the values of S_i and R_i , then the smallest and largest values of S_i and R_i , and the last is to determine the magnitude of the value of Q_i . Note (Table 8) which describes each calculation result of the index value and (Table 9), which describes the ranking order obtained from the VIKOR index, which is sorted in ascending order to make it easier to read the rankings.

It should be noted that basically, the calculation process in VIKOR is said to be simple, if it does not include the respective magnitude of the criterion weight values, in this study the criteria are determined by a certain amount through calculations using algebra matrices, thus making the data processing even more complicated, such as shown in (table-7) which gives the weighted value to a certain quantity of each criterion. Obviously, this will provide a greater degree of complexity.

*name of corresponding author



This is an Creative Commons License This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License.

Table-7
Multiply Normalization by eigenvector

Type	GB	GD	GK	GP	SU	PU	SJ	PU
Criteria	(LB)	(LB)	(LB)	(LB)	(HB)	(HB)	(HB)	(HB)
(Alt)	$V=(R_i \cdot EV)$							
AT1	0.24	0.12	0.05	0.10	0.32	0.00	0.20	0.07
AT2	0.00	0.00	0.11	0.07	0.06	0.05	0.09	0.13
AT3	0.34	0.06	0.10	0.07	0.22	0.23	0.19	0.08
AT4	0.42	0.07	0.10	0.11	0.00	0.10	0.01	0.02
AT5	0.24	0.07	0.00	0.08	0.38	0.26	0.11	0.00
AT6	0.12	0.29	0.16	0.03	0.26	0.15	0.05	0.10
AT7	0.22	0.18	0.17	0.00	0.10	0.28	0.09	0.03
AT8	0.14	0.17	0.04	0.07	0.19	0.08	0.00	0.07
AT9	0.21	0.28	0.00	0.07	0.22	0.21	0.08	0.10

Table 8
Index VIKOR

Alt	Si	Ri	S'	S*	R'	R*	Qi	Index
AT1	1.10	0.32	0.52	1.29	0.13	0.42	0.70	4
AT2	0.52	0.13					0.00	1
AT3	1.29	0.34					0.87	9
AT4	0.84	0.42					0.70	7
AT5	1.13	0.38					0.83	8
AT6	1.16	0.29					0.70	5
AT7	1.08	0.28					0.62	3
AT8	0.75	0.19					0.25	2
AT9	1.18	0.28					0.69	6

Tables 8 and 9 illustrate that the dimensions S', S*, R', and R* are only written once, because it means that the dimension S' is the lowest value in column S and the dimension S* is the highest value in column S. Likewise for the dimension R' as the smallest value in column R, and the dimension R* as the largest value in column R.

Table 9
Shorting Rank Swimming Athlete

Alt	Si	Ri	S'	S*	R'	R*	Qi	Rank
AT2	0.52	0.13	0.52	1.30	0.13	0.42	0.00	1
AT8	0.75	0.19					0.25	2
AT7	1.08	0.28					0.61	3
AT1	1.10	0.32					0.69	4
AT6	1.16	0.29					0.69	5
AT9	1.18	0.29					0.69	6
AT4	0.84	0.42					0.71	7
AT5	1.14	0.38					0.83	8
AT3	1.30	0.35					0.87	9

DISCUSSIONS

Selection using the VIKOR method can be done normally or can be done by using the value of importance to the criteria used, in this research, it was carried out using the help of optimal eigenvalues by using algebra matrices mathematically so that it looks more complex and complicated because That is, if there is indeed an opportunity to re-test without using the value of importance, will it give the same value to the decision results as produced using the eigenvector value that was done. If it does give the same decision, this is a clear form of truth; otherwise, we must pay more attention to the application stated in the VIKOR algorithm steps. While the role of AHP is used

*name of corresponding author



This is an Creative Commons License This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License.

in two function, the first as a preference in the weighting of each criterion and the second as a multiplier during the normalization weighting process during the process of determining the preference index.

CONCLUSION

From the problems faced by how to select swimming athletes at the Millennial Aquatic Swimming Club by measuring the application of the four swimming styles to the plyometrics technique so that it can be applied correctly by a swimming athlete in achieving exploration of leg muscle strength and hand muscles. The results obtained from nine swimming athletes using the AHP and VIKOR methods, namely AT2 managed to rank first with the smallest index value, namely 0.00, while the second position was occupied by AT8 with an index value of 0.25, while AT7 occupied the third position with an index value of 0.61. . Thus the collaboration method between the Analytic Hierarchy Process (AHP) and the VIKOR method can provide optimal decisions on the selection and evaluation of nine swimming athletes against the three chosen as winners..

ACKNOWLEDGMENT

Thank you to my family who wants to support in this research process which is very helpful morally, then to other parties I do not forget to thank Nusa Mandiri University for providing support in the form of motivation to write this article and the publishing party from the editorial staff. Who is willing to accept this article even though it is in such a careful process in selecting the topic until it is published.

REFERENCES

- Alonso, J. A., & Lamata, M. T. (2006). Consistency in the analytic hierarchy process: a new approach. *International Journal of Uncertainty, Fuzziness and Knowledge-Based Systems*, 14(4), 445–459. <https://doi.org/10.1142/S0218488506004114>
- Annisa, S. (2020). Kegiatan olahraga aktivitas air. *SMAN 3 Medan*, 1(1), 1–17.
- Brugha, C. M. (2004). Structure of multi-criteria decision-making. *Journal of the Operational Research Society*, 55(11), 1156–1168. <https://doi.org/10.1057/palgrave.jors.2601777>
- Dincer, H., & Hacıoglu, U. (2013). Performance evaluation with fuzzy VIKOR and AHP method based on customer satisfaction in Turkish banking sector. *Kybernetes*, 42(7), 1072–1085. <https://doi.org/10.1108/K-02-2013-0021>
- Ghaleb, A. M., Kaid, H., Alsamhan, A., Mian, S. H., & Hidri, L. (2020). Assessment and Comparison of Various MCDM Approaches in the Selection of Manufacturing Process. *Advances in Materials Science and Engineering*, 2020. <https://doi.org/10.1155/2020/4039253>
- Haji, M., Kamankesh, M. R., Jamshidi, M., Daghighi, M., & Shaltooli, A. A. (2019). A multi-criteria ranking algorithm based on the VIKOR method for meta-search engines. *International Journal on Informatics Visualization*, 3(3), 248–254. <https://doi.org/10.30630/ijiv.3.3.269>
- Ishizaka, A., & Labib, A. (2011). Review of the main developments in the analytic hierarchy process. *Pre Print Version*, 38(11), 14336–14345. <https://doi.org/10.1016/j.eswa.2011.04.143>
- Mardani, A., Zavadskas, E. K., Govindan, K., Senin, A. A., & Jusoh, A. (2016). VIKOR technique: A systematic review of the state of the art literature on methodologies and applications. *Sustainability (Switzerland)*, 8(1), 1–38. <https://doi.org/10.3390/su8010037>
- Pendidikan, F., & Dan, O. (2016). *Pengaruh Latihan Plyometrics Terhadap*. 01(01), 6–11.
- Priana, A. (2019). Pengaruh Alat Bantu Latihan Pull Buoy Terhadap Prestasi Renang Gaya Dada. *Journal of SPORT (Sport, Physical Education, Organization, Recreation, and Training)*, 3(1), 9–14. <https://doi.org/10.37058/sport.v3i1.745>
- Ramezaniyan, M. R., Kazemi, M., Jafari, H., & Elahi, S. M. (2012). Application of integrated fuzzy VIKOR & AHP methodology to contractor ranking. *Management Science Letters*, 2(5), 1511–1526. <https://doi.org/10.5267/j.msl.2012.05.017>
- Rasyid, H. Al, Setyakarnawijaya, Y., & Marani, I. N. (2017). Hubungan Kekuatan Otot Tungkai Dan Kekuatan Otot Lengan Dengan Hasil Renang Gaya Bebas 50 Meter Pada Atlet Millennium Aquatic Swimming Club. *Jurnal Ilmiah Sport Coaching and Education*, 1(1), 71–85. <https://doi.org/10.21009/jsce.01106>
- Saaty, T. L. (2008). Decision making with the analytic hierarchy process. *International Journal of Services Sciences*, 1(1), 83. <https://doi.org/10.1504/IJSSCI.2008.017590>
- Sasanka, C. T., & Ravindra, K. (2015). Implementation of VIKOR Method for Selection of Magnesium Alloy to Suit Automotive Applications. *International Journal of Advanced Science and Technology*, 83, 49–58.
- Shava, I., Kusuma, D. W. Y., & Rustiadi, T. (2017). Latihan Plyometrics dan Panjang Tungkai terhadap Kecepatan Renang Gaya Dada Atlet Renang Sumatera Selatan. *Physical Education and Sports*, 6(3), 266–271.

*name of corresponding author



This is an Creative Commons License This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License.

- The, F. O. R., Person, L. A. Y., & Lipovetsky, S. (1936). *An Interpretation Of The AHP Eigenvector Solution GfK Custom Research North America 8401 Golden Valley Rd ., Minneapolis , MN 55427 , USA 2 . The AHP solution and its interpretation for the maximum eigenvalue λ yields the principal eigenvector α which ser.* 2(2), 158–162.
- Thipparat, T., & Thaseepetch, T. (2013). An integrated VIKOR and fuzzy AHP method for assessing a sustainable research project. *World Applied Sciences Journal*, 22(12), 1729–1738. <https://doi.org/10.5829/idosi.wasj.2013.22.12.2787>
- Umar, I. K., & Samir, B. (2019). Cumhuriyet Science Journal CSJ. *Cumhuriyet Sci. J.*, 40(1), 197–203. <https://doi.org/http://dx.doi.org/10.17776/csaj.356185>
- Velasquez, M., & Hester, P. (2013). An analysis of multi-criteria decision making methods. *International Journal of Operations Research*, 10(2), 56–66.
- Wibawa, A. P., Fauzi, J. A., Isbiyantoro, S., Irsyada, R., Dhaniyar, & Hernández, L. (2019). VIKOR multi-criteria decision making with AHP reliable weighting for article acceptance recommendation. *International Journal of Advances in Intelligent Informatics*, 5(2), 160–168. <https://doi.org/10.26555/ijain.v5i2.172>
- Yang, M. H., Su, C. H., & Wang, W. C. (2017). The use of a DANP with VIKOR approach for establishing the model of e-learning service quality. *Eurasia Journal of Mathematics, Science and Technology Education*, 13(8), 5927–5937. <https://doi.org/10.12973/eurasia.2017.01041a>

*name of corresponding author



This is an Creative Commons License This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License.

Selection of the Best Swimming Athletes using MCDM-AHP and VIKOR Methods

by Akmaludin Akmaludin

Submission date: 04-Nov-2021 01:56PM (UTC+0700)

Submission ID: 1692757444

File name: Artikel_J-Sinkron_Vol_6_No_2_Oktober_2021-Athletes.pdf (438.92K)

Word count: 5518

Character count: 26293

Selection of the Best Swimming Athletes using MCDM-AHP and VIKOR Methods

Akmaludin^{1)*}, Si¹⁹²⁾, Nandang Iriadi³⁾, Adhi Dharma Surianto⁴⁾, Andi Arfian⁵⁾

^{1,2,5)} Universitas Nusa Mandiri, Jakarta²⁾, Indonesia

^{3,4)} Universitas Bina Sarana Informatika, Jakarta, Indonesia

¹⁾akmaludin.akm@nusamandiri.ac.id, ²⁾sidik.sdk@nusamandiri.ac.id, ³⁾nandang.ndn@bsi.ac.id
⁴⁾adhi.ais@bsi.ac.id, ⁵⁾andi.afn@nusamandiri.ac.id

Submitted : May 22, 2021 | Accepted : June 22, 2021 | Published : Oct 8, 2021

Abstract: The process of selecting the best swimming athletes is carried out in several test stages. The first is the ability in the four basic swimming styles often contested in international competitions. The second test is the basic physical abilities possessed by a number of swimming athletes. The tests related to the swimming style consist of breaststroke swimming, butterfly swimming, backstroke swimming and crawl stroke swimming, while the plyometrics test consists of banded knee jump, squat jump, jump to the side, and dept jump; due to a large number of selections, a test is required for every athlete. The purpose of this selection is to find the best swimming athletes who will be competed in the international swimming class event. The nine athletes of the Millenium aquatic swimming club that were selected previously are the forerunners of the selected swimming athletes and will be evaluated on a representative basis, which is the best among the nine athletes. The method used in the evaluation and selection process uses two continuous methods, namely the AHP and VIKOR methods. From the results selection assessment, it was found that the best three of the nine nominations selected, the first position selected was AT2 with an index 0.00, the second position was AT8 with an index 0.25, and the third position was AT7 with an index 0.61. Thus it can be concluded that the AHP and VIKOR methods can be used as decision support to determine optimally in the optimal selection process for swimming athletes.

Keywords: Athlete, AHP, Plyometrics, Swimming style, VIKOR.

INTRODUCTION

Every swimming athlete must often do plyometrics test exercises, and plyometrics is a form of high-intensity training that aims to increase strength and speed towards building power in swimming athletes (Pendidikan & Dan, 2016). Plyometrics can be done by anyone and can build strength in the leg muscles. Techniques that can be done are the banded knee jump, squat jump, side jump, and dept jump (Shava et al., 2017). This is done to create power, especially in breaststroke swimming. Another important aspect is the starting technique, in which the coaches do not forget how to treat a good start so as to give strong resistance to starting competitions in swimming. The starting technique will build a strong power in the start box. There are several ways to start, namely racing start, swim start, grab start, and tract start (Rasyid et al., 2017). In swimming exercises, you will get used to starting with the help of leg muscles and arm muscles explosively, where the two-leg muscles and arm muscles that are combined will give an explosion against repulsion at start, thus the speed will increase and have a high effect on speed in swimming.

For prepare for the competition in the international event arena, swimming athletes are strived to diligently do exercises on muscle strength both for the leg muscles and hand muscle strength; this is the reason for achieving victory in every competition for swimming athletes, so it is necessary to do serious training to get the expected victory for representatives especially for athletes in the millennium aquatic swimming club. Muscles, indeed legs are very important to be learned by swimming athletes so this plyometrics exercise has a very strong influence on all swimming styles that are used (Annisa, 2020). there is. So that the purpose of this paper is to carry out a selection process for the nine swimming athletes at the Millennial Aquatic Swimming Club, through the application of leg muscle strength tests with the application of the four swimming styles that are contested (Priana, 2019). The measuring instruments used include microtois, stopwatches, and writing instruments. The distance traveled which is the test material is for a distance of 50 meters for four swimming styles. The results are recorded for data analysis using the Analyze Hierarchical Process (AHP) method associated with the VIKOR method (Wibawa et al., 2019), (Dincer & Hacıoglu, 2013). These two methods are groups of Multi-Criteria Decision Making (MCDM) and have the same role in both methods, namely for the selection process and

*name of corresponding author



This is an Creative Commons License This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License.

evaluation of all processes and activities that indicate ranking (Thipparat & Thaseepetch, 2013), thus both AHP and VIKOR methods can collaborate into a single method that can deal with problems related to the selection process for swimming athletes (Yang et al., 2017) for all swimming styles that are often competed in national and international high-level competitions, especially regarding existing swimming style variants.

LITERATURE REVIEW

17

Multi-criteria Decision Making-Analytic Hierarchical Process (MCDM-AHP)

Analytic Hierarchical Process (AHP) is a method used to solve problems that are qualitative and quantitative and can even handle problems that are a combination of the two (Brugha, 2004). AHP that will be used is AHP which is Multi-Criteria (Saaty, 2008), which means that the problem uses many criteria. This is what makes it difficult to determine the priority of many of these criteria (Thipparat & Thaseepetch, 2013). Therefore, all complicated problems must be simplified by using the hierarchy model (Brugha, 2004), because, with this hierarchy, it will be easier and simpler to determine the weight of each of a number of alternatives based on a number of criteria used as a barometer of measurement (Velasquez & Hester, 2013) (Ishizaka & Labib, 2011). Each hierarchy will provide a value called an eigenvector, of course, the eigenvector, which is applied using the Multi-Criteria Decision Making (MCDM) method is of course to get the optimal eigenvector (Alonso & Lamata, 2006), (Dincer & Hacıoglu, 2013). The optimal eigenvector is the provision of a value for the eigenvector that does not have a difference to the last eigenvector with the previous eigenvector value that has gone through the iteration stage in multiplying pairwise matrices in each hierarchy level. Multiplication of matrices can be done by squaring pairwise matrices (1) with the same matrices, and the results will be stored in certain matrices, then the resulting material must be squared, and the results will be saved in certain matrices. The two certain matrices will be processed by determining normalization to get the eigenvector value. If there is a difference between the two, then multiplication must be done again from the second particular matrices and so on until you find the optimal eigenvector value. To get the optimal eigenvector value, of course, you will go through the iteration stage in multiplying pairwise matrices. Several formulations that can be used with the MCDM-AHP method are determining pairwise matrices, which are arranged based on the hierarchical model created (Ghaleb et al., 2020). The pairwise matrices that are set must follow the rules of Thomas L. Saaty with an order that is adjusted to the value of the Random Index (RI). Note that the RI table that is applied in table-1 has been determined internationally, the amount of which is adjusted to each order of the matrices. Previously there are several important things to determine the consistency of the final result whether a temporary decision is acceptable or not, namely by looking for the Consistent Index (CI) in (2) combined with the Random Index value to obtain the Consistency Ratio (CR) applied to (3) (The et al., 1936). The results obtained through the calculation of mathematical algebraic matrices can be tested using the expert choice application .

$$M_{(r,s)} = \begin{bmatrix} x_{(1,1)} & x_{(1,2)} & x_{(1,3)} & \dots & x_{(1,s)} \\ x_{(2,1)} & x_{(2,2)} & x_{(2,3)} & \dots & x_{(2,s)} \\ x_{(3,1)} & x_{(3,2)} & x_{(3,4)} & \dots & x_{(3,s)} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ x_{(r,1)} & x_{(r,2)} & x_{(r,3)} & \dots & x_{(r,s)} \end{bmatrix} \quad (1)$$

$$CI = \frac{(\lambda_{\max} - n)}{(n-1)} \quad (2)$$

$$CR = \frac{CI}{RI} \quad (3)$$

Table 1
Random Index

Ordo	1	2	3	4	5	6	7	8	9	10
RI	0.00	0.00	0.58	0.90	1.12	1.24	1.32	1.41	1.45	1.48

*name of corresponding author



This is an Creative Commons License This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License.

VIKOR

VIKOR is a method that can be used for ranking selection using the index system (Umar & Samir, 2019), where the highest rank is determined by the smallest index magnitude or zero value. The VIKOR method applies the concept of elimination which is very different from the others, and the VIKOR method emphasizes the indexed system. Where is the indexed system, which is ascending index, by determining the amount of determination of the index at the accumulation stage (Mardani et al., 2016), (Ramezaniyan et al., 2012). In the process, the VIKOR method has fairly simple stages, but only at the Si and Ri acquisition stages, where these dimensions will be used after the normalization stage has been carried out on the dataset. The obstacle that often occurs is understanding in determining the criteria on the dataset because each criterion in the dataset has two basic understandings where many researchers assume that all data are the same, even though they are not. There is a criterion that has an inverse meaning that the smallest is the best. This can happen in terms of time. As is the case in this study, to calculate the fastest athlete in the calculation of time, of course, the athlete who has the smallest time value that describes the fastest athlete in the swimming race, so this will be a determination that the smallest value seen on the stopwatch is the best. In general, the greatest value is the best value. So that the normalization that is carried out is of course also different from the others. Agree that there are 5 assessment assumptions, namely 1) the largest value is the best and pay attention 4) which explains that 5) largest value is the best, and 2) the smallest value is the best value and pay attention (5) which explains that the smallest value is the best value. This study will apply both understandings. These two things must distinguish in the normalization process of each row of data, this is so that they have the same meaning that is parallel. If you use the amount of comparison for each criterion, determine it first by multiplying it according to the importance value of each criterion by the dimension v listed in (6). In the process of determining the maximum value dimensioned by Si, pay attention (7) and the maximum magnitude of each row of normalized data Ri from each row in determining it (Sasanka & Ravindra, 2015), pay attention (8).

$$H_{(i,j)} = \frac{(A_{(i,j)} - A'_{(j)})}{(A^*_{(j)} - A'_{(j)})} \quad (4)$$

$$L_{(i,j)} = \frac{(A_{(i,j)} - A^*_{(j)})}{(A'_{(j)} - A^*_{(j)})} \quad (5)$$

$$v = R_i * W \quad (6)$$

$$S_i = \sum_{j=1}^n W_j R_{(i,j)} \quad (7)$$

$$R_i = \max_j [W_j \times R_{(i,j)}] \quad (8)$$

$$Q_i = \left[\frac{S_i - S'}{S^* - S'} \right] \times V + \left[\frac{R_i - R'}{R^* - R'} \right] \times (1 - V) \quad (9)$$

For every dataset that has been determined Si amount and Ri amount, of course it will be easy to determine the smallest value of each amount and the largest value of each amount of line. it is also easy to determine the smallest value of the maximum every line and also the largest value of the maximum of each line. that can last determine index value amount on the overall data with the value of v can be determined based on certain provisions or use the same comparison of fifty percent of each amount. So that index Vikor will be easily according to the formula listed in (9).

METHOD

In the VIKOR method, it can be described in a simple way to be able to understand and understand the processes, there are several stages that are explained step by step, and this can be said to be an algorithm for using the VIKOR method (Haji et al., 2019). These stages involve using the VIKOR method in detail and in detail through the stages listed in fig.1. Step by step is explained in stages and what is unique in the VIKOR algorithm is the separation process between understanding the largest value is the best, and the smallest value is the best; this is done so that the unification process must be normalized first so that the calculation process can be done with one angle. View the same or in line. Thus the normalization process can be carried out easily to produce a good integration into normalization. Thus the normalization table will be formed into a complete unit and ready to be processed in the calculation of the VIKOR method until the final determination of the ranking process, in

*name of corresponding author



This is an Creative Commons License This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License.

determining the weight with normalization data, calculating the value of R_i , calculating the value of S_i to determining the amount of the value of Q_i .

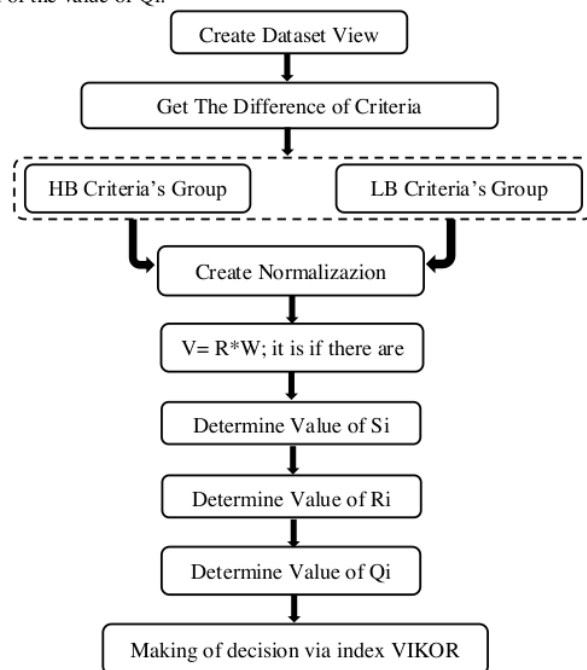


Fig. 1. VIKOR Algorithm.

RESULT

Departing from the establishment of a dataset view which is a snippet of swimming athletes at the Millennial Aquatic Swimming Club who developed techniques in four swimming styles that are based on the development of leg muscles and hand muscles, into a unique study in increasing the explosion that provides a strong thrust in each. Swimming style. Of the nine athletes who were candidates for swimming style athletes with measurements using tools such as microtoise, stopwatch, and writing instruments to record the results for each swimming stroke with a special distance of 50 meters. The measurement taken is plyometrics, which is a form of high-intensity training that aims to increase strength and speed towards power building for each swimming athlete. Testing is done by taking four swimming styles, namely freestyle, breaststroke, backstroke and butterfly stroke, plus four plyometrics techniques, namely banded knee jump, squat jump, jump to the side, and dept jump. This will be applied with a combination method between AHP and VIKOR, of course, with the conditions listed in table-2, while the results obtained are described in a dataset view, pay attention table-3. Several things need to be considered in Fig. 2 with an explanation of the criteria for the following criteria:

Table 2
Roof of criteria

Acronim	Criteria	Category
GB	Crawl stroke (CS)	LB
GD	Breast stroke (BS)	LB
GK	Butterfly strok (BT)	LB
GP	Back crawl (BC)	LB
BJ	Banded Knee Jump (BJ)	HB
SJ	Squat Jump (SJ)	HB
JS	Jump to Side (JS)	HB
DJ	Dept Jump (DJ)	HB

*name of corresponding author



This is an Creative Commons License This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License.

While the dataset view generated from nine athletes provides a detailed description of the results of the acquisition of microtois and stopwatch with the results shown in (table-3) but (table 4) as a form of normalization of the dataset view. To determine the importance value of the four swimming styles and leg muscle strength with plyometrics, it is assisted by determining each of its important values with the help of the Analytic Hierarchy Process (AHP) method. In this case, it is divided into two parts, namely, to determine the importance value of the four swimming styles and the importance value for testing with plyometrics. This is done to determine the importance value of each criterion. Note (table-5) which is a pairwise matrix of four swimming styles processed using algebra matrices mathematically, the calculation results occur in five iteration stages to get the optimal eigenvector value, as for the final results obtained for the value λ max, optimal eigenvector, consistency index, and the consistency ratio can be seen in (table-5) and included with the eigenvector value calculation using the expert choice application in (figure-2), whereas to determine the importance value related to the plyometrics results with the four criteria used can be seen in (Table-6) with a total of five iterations to get the optimal eigenvector value using algebra matrices mathematically and included with the eigenvector value calculation using the expert choice application in (figure-3).

Table 3
Dataset View

Criteria	CS (LB)	BS (LB)	BT (LB)	BC (LB)	BJ (HB)	SJ (HB)	JS (HB)	DJ (HB)
AT1	80.96	72.66	78.52	79.77	35	22	43	30
AT2	97.92	80.88	84.57	73.54	27	24	35	34
AT3	73.76	77.16	82.83	75.15	32	31	42	31
AT4	68.32	76.32	83.50	82.78	25	26	29	27
AT5	81.28	75.90	73.54	75.78	37	32	36	26
AT6	89.68	61.32	88.71	66.75	33	28	32	32
AT7	82.08	69.12	89.89	60.66	28	33	35	28
AT8	88.40	69.36	77.46	73.75	31	25	28	30
AT9	82.80	61.92	73.54	75.01	32	30	34	32

Table 4
Normalization

Type	CS (LB)	GD (LB)	GK (LB)	GP (LB)	SU (HB)	PU (HB)	SJ (HB)	PU (HB)
Criteria	(Alt)	(Alt)	(Alt)	(Alt)	(Alt)	(Alt)	(Alt)	(Alt)
(Alt)	0.42	0.29	0.17	0.11	0.38	0.28	0.20	0.13
AT1	0.57	0.42	0.30	0.86	0.83	0.00	1.00	0.50
AT2	0.00	0.00	0.67	0.58	0.17	0.18	0.47	1.00
AT3	0.82	0.19	0.57	0.66	0.58	0.82	0.93	0.63
AT4	1.00	0.23	0.61	1.00	0.00	0.36	0.07	0.13
AT5	0.56	0.25	0.00	0.68	1.00	0.91	0.53	0.00
AT6	0.28	1.00	0.93	0.28	0.67	0.55	0.27	0.75
AT7	0.54	0.60	1.00	0.00	0.25	1.00	0.47	0.25
AT8	0.32	0.59	0.24	0.59	0.50	0.27	0.00	0.50
AT9	0.51	0.97	0.00	0.65	0.58	0.73	0.40	0.75

Table 5
Eigenvector swimming style using algebra matrices

Swimming Style	BS	BT	BC	CS	Eigenvector
Breast Stroke (BS)	1.000	1.632	2.760	3.000	0.424
Butterfly Stroke (BT)	0.613	1.000	1.823	2.852	0.294
Back Crawl (BC)	0.362	0.549	1.000	1.802	0.170
Crawl Stroke (CS)	0.333	0.351	0.555	1.000	0.112
λ max=	4.030	CI=	0.010	CR=	0.011

*name of corresponding author



This is an Creative Commons License This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License.

Priorities with respect to:
Goal: Swimming style pairwise ...



Fig. 2. Eigenvector swimming style using expert choice application

Table 6
Eigenvector plyometrics using algebra matrices

Plyometrics	BJ	SJ	JS	DJ	Eigenvector
Banded Knee Jump (BJ)	1.000	1.636	1.895	2.437	0.384
Squat Jump (SJ)	0.611	1.000	1.745	2.039	0.282
Jump to Side (JS)	0.528	0.573	1.000	1.798	0.199
Dept Jump (DJ)	0.410	0.490	0.556	1.000	0.134
λ_{max}	4.035	CI=	0.012	CR=	0.013

Priorities with respect to:
Goal: Plyometrics pairwise



Fig. 3. Eigenvector plyometrics using the expert choice application.

The development of the view dataset must be determined in advance in the form of normalization, which will provide an overview of each data being in the right position within its respective range. The normalization table can be obtained with the help (Equation-4) and (Equation-5), which is shown in (Table-4). With the second help (Table-5) and (Table-6) so that each value of importance to pairwise matrices on swimming style and plyometrics results using the help of the mathematical algebra matrices process, provides a sign for determining the amount of weight for each dataset view that is must be multiplied by each eigenvector value for each criterion and the results obtained from this multiplication can be seen in (Table-7). That what is seen in (Table-7) is a result of complexity containing each criterion which is equipped with the meaning of each group of criteria consisting of the swimming style group and the importance value of the plyometrics which have been proven by their respective importance values, thus (Table- 7) has described the overall collaboration of the two methods, namely the **Analytic Hierarchy Process (AHP) method and the VIKOR method**, which are only partially seen in the table. The basis for determining the VIKOR index is clear; using a number of formulas above can be applied in determining the VIKOR index based on (Table-7) below. The steps taken using the VIKOR algorithm are very simple to perform calculations according to the VIKOR algorithm stages. The first step is to determine the magnitude of the values of S_i and R_i , then the smallest and largest values of S_i and R_i , and the last is to determine the magnitude of the value of Q_i . Note (Table 8) which describes each calculation result of the index value and (Table 9), which describes the ranking order obtained from the VIKOR index, which is sorted in ascending order to make it easier to read the rankings.

It should be noted that basically, the calculation process in VIKOR is said to be simple, if it does not include the respective magnitude of the criterion weight values, in this study the criteria are determined by a certain amount through calculations using algebra matrices, thus making the data processing even more complicated, such as shown in (table-7) which gives the weighted value to a certain quantity of each criterion. Obviously, this will provide a greater degree of complexity.

*name of corresponding author



This is an Creative Commons License This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License.

Table-7
Multiply Normalization by eigenvector

Type	SB	GD	GK	GP	SU	PU	SJ	PU
Criteria	(LB)	(LB)	(LB)	(LB)	(HB)	(HB)	(HB)	(HB)
(Alt)	$V=(R_i^*EV)$							
AT1	0.24	0.12	0.05	0.10	0.32	0.00	0.20	0.07
AT2	0.00	0.00	0.11	0.07	0.06	0.05	0.09	0.13
AT3	0.34	0.06	0.10	0.07	0.22	0.23	0.19	0.08
AT4	0.42	0.07	0.10	0.11	0.00	0.10	0.01	0.02
AT5	0.24	0.07	0.00	0.08	0.38	0.26	0.11	0.00
AT6	0.12	0.29	0.16	0.03	0.26	0.15	0.05	0.10
AT7	0.22	0.18	0.17	0.00	0.10	0.28	0.09	0.03
AT8	0.14	0.17	0.04	0.07	0.19	0.08	0.00	0.07
AT9	0.21	0.28	0.00	0.07	0.22	0.21	0.08	0.10

Table 8
Index VIKOR

Alt	Si	Ri	S'	S*	R'	R*	Qi	Index
AT1	1.10	0.32	0.52	1.29	0.13	0.42	0.70	4
AT2	0.52	0.13					0.00	1
AT3	1.29	0.34					0.87	9
AT4	0.84	0.42					0.70	7
AT5	1.13	0.38					0.83	8
AT6	1.16	0.29					0.70	5
AT7	1.08	0.28					0.62	3
AT8	0.75	0.19					0.25	2
AT9	1.18	0.28					0.69	6

Tables 8 and 10 illustrate that the dimensions S', S*, R', and R* are only written once, because it means that the dimension S' is the lowest value in column S and the dimension S* is the highest value in column S. Likewise for the dimension R' as the smallest value in column R, and the dimension R* as the largest value in column R.

Table 9
Shorting Rank Swimming Athlete

Alt	Si	Ri	S'	S*	R'	R*	Qi	Rank
AT2	0.52	0.13	0.52	1.30	0.13	0.42	0.00	1
AT8	0.75	0.19					0.25	2
AT7	1.08	0.28					0.61	3
AT1	1.10	0.32					0.69	4
AT6	1.16	0.29					0.69	5
AT9	1.18	0.29					0.69	6
AT4	0.84	0.42					0.71	7
AT5	1.14	0.38					0.83	8
AT3	1.30	0.35					0.87	9

DISCUSSIONS

Selection using the VIKOR method can be done normally or can be done by using the value of importance to the criteria used, in this research, it was carried out using the help of optimal eigenvalues by using algebra matrices mathematically so that it looks more complex and complicated because That is, if there is indeed an opportunity to re-test without using the value of importance, will it give the same value to the decision results as produced using the eigenvector value that was done. If it does give the same decision, this is a clear form of truth; otherwise, we must pay more attention to the application stated in the VIKOR algorithm steps. While the role of AHP is used

*name of corresponding author



This is an Creative Commons License This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License.

in two function, the first as a preference in the weighting of each criterion and the second as a multiplier during the normalization weighting process during the process of determining the preference index.

CONCLUSION

From the problems faced by how to select swimming athletes at the Millennial Aquatic Swimming Club by measuring the application of the four swimming styles to the plyometrics technique so that it can be applied correctly by a swimming athlete in achieving exploration of leg muscle strength and hand muscles. The results obtained from nine swimming athletes using the AHP and VIKOR methods, namely AT2 managed to rank first with the smallest index value, namely 0.00, while the second position was occupied by AT8 with an index value of 0.25, while AT7 occupied the third position with an index value of 0.61. . Thus the collaboration method between the Analytic Hierarchy Process (AHP) and the VIKOR method can provide optimal decisions on the selection and evaluation of nine swimming athletes against the three chosen as winners..

2

ACKNOWLEDGMENT

Thank you to my family who wants to support in this research process which is very helpful morally, then to other parties I do not forget to thank Nusa Mandiri University for providing support in the form of motivation to write this article and the publishing party from the editorial staff. Who is willing to accept this article even though it is in such a careful process in selecting the topic until it is published.

REFERENCES

- Alonso, J. A., & Lamata, M. T. (2006). Consistency in the analytic hierarchy process: a new approach. *International Journal of Uncertainty, Fuzziness and Knowledge-Based Systems*, 14(4), 445–459. <https://doi.org/10.1142/S0218488506004114>
- Annisa, S. (2020). Kegiatan olahraga aktivitas air. *SMAN 3 Medan*, 1(1), 1–17.
- Brugha, C. M. (2004). Structure of multi-criteria decision-making. *Journal of the Operational Research Society*, 55(11), 1156–1168. <https://doi.org/10.1057/palgrave.jors.2601777>
- Dincer, H., & Hacıoglu, U. (2013). Performance evaluation with fuzzy VIKOR and AHP method based on customer satisfaction in Turkish banking sector. *Kybernetes*, 42(7), 1072–1085. <https://doi.org/10.1108/K-02-2013-0021>
- Ghaleb, A. M., Kaid, H., Alsamhan, A., Mian, S. H., & Hidri, L. (2020). Assessment and Comparison of Various MCDM Approaches in the Selection of Manufacturing Process. *Advances in Materials Science and Engineering*, 2020. <https://doi.org/10.1155/2020/4039253>
- Haji, M., Kamankesh, M. R., Jamshidi, M., Daghighi, M., & Shaltooli, A. A. (2019). A multi-criteria ranking algorithm based on the VIKOR method for meta-search engines. *International Journal on Informatics Visualization*, 3(3), 248–254. <https://doi.org/10.30630/ijov.3.3.269>
- Ishizaka, A., & Labib, A. (2011). Review of the main developments in the analytic hierarchy process. *Pre Print Version*, 38(11), 14336–14345. <https://doi.org/10.1016/j.eswa.2011.04.143>
- Mardani, A., Zavadskas, E. K., Govindan, K., Senin, A. A., & Jusoh, A. (2016). VIKOR technique: A systematic review of the state of the art literature on methodologies and applications. *Sustainability (Switzerland)*, 8(1), 1–38. <https://doi.org/10.3390/su8010037>
- Pendidikan, F., & Dan, O. (2016). *Pengaruh Latihan Plyometrics Terhadap*. 01(01), 6–11.
- Priana, A. (2019). Pengaruh Alat Bantu Latihan Pull Buoy Terhadap Prestasi Renang Gaya Dada. *Journal of SPORT (Sport, Physical Education, Organization, Recreation, and Training)*, 3(1), 9–14. <https://doi.org/10.37058/sport.v3i1.745>
- Ramezaniyan, M. R., Kazemi, M., Jafari, H., & Elahi, S. M. (2012). Application of integrated fuzzy VIKOR & AHP methodology to contractor ranking. *Management Science Letters*, 2(5), 1511–1526. <https://doi.org/10.5267/j.msl.2012.05.017>
- Rasyid, H. Al, Setyakarnawijaya, Y., & Marani, I. N. (2017). Hubungan Kekuatan Otot Tungkai Dan Kekuatan Otot Lengan Dengan Hasil Renang Gaya Bebas 50 Meter Pada Atlet Millennium Aquatic Swimming Club. *Jurnal Ilmiah Sport Coaching and Education*, 1(1), 71–85. <https://doi.org/10.21009/jsce.01106>
- Saaty, T. L. (2008). Decision making with the analytic hierarchy process. *International Journal of Services Sciences*, 1(1), 83. <https://doi.org/10.1504/IJSSCI.2008.017590>
- Sasanka, C. T., & Ravindra, K. (2015). Implementation of VIKOR Method for Selection of Magnesium Alloy to Suit Automotive Applications. *International Journal of Advanced Science and Technology*, 83, 49–58.
- Shava, I., Kusuma, D. W. Y., & Rustiadi, T. (2017). Latihan Plyometrics dan Panjang Tungkai terhadap Kecepatan Renang Gaya Dada Atlet Renang Sumatera Selatan. *Physical Education and Sports*, 6(3), 266–271.

*name of corresponding author



This is an Creative Commons License This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License.

- The, F. O. R., Person, L. A. Y., & Lipovetsky, S. (1936). *An Interpretation Of The AHP Eigenvector Solution GfK Custom Research North America 8401 Golden Valley Rd ., Minneapolis , MN 55427 , USA 2 . The AHP solution and its interpretation for the maximum eigenvalue λ yields the principal eigenvector a which ser.* 2(2), 158–162.
- Thipparat, T., & Thaseepetch, T. (2013). An integrated VIKOR and fuzzy AHP method for assessing a sustainable research project. *World Applied Sciences Journal*, 22(12), 1729–1738. <https://doi.org/10.5829/idosi.wasj.2013.22.12.2787>
- Umar, I. K., & Samir, B. (2019). Cumhuriyet Science Journal CSJ. *Cumhuriyet Sci. J.*, 40(1), 197–203. <https://doi.org/http://dx.doi.org/10.17776/csj.356185>
- Velasquez, M., & Hester, P. (2013). An analysis of multi-criteria decision making methods. *International Journal of Operations Research*, 10(2), 56–66.
- Wibawa, A. P., Fauzi, J. A., Isbiyanto, S., Irsyada, R., Dhaniyar, & Hernández, L. (2019). VIKOR multi-criteria decision making with AHP reliable weighting for article acceptance recommendation. *International Journal of Advances in Intelligent Informatics*, 5(2), 160–168. <https://doi.org/10.26555/ijain.v5i2.172>
- Yang, M. H., Su, C. H., & Wang, W. C. (2017). The use of a DANP with VIKOR approach for establishing the model of e-learning service quality. *Eurasia Journal of Mathematics, Science and Technology Education*, 13(8), 5927–5937. <https://doi.org/10.12973/eurasia.2017.01041a>

*name of corresponding author



This is an Creative Commons License This work is licensed under a Creative Commons Attribution-NonCommercial 4.0 International License.

Selection of the Best Swimming Athletes using MCDM-AHP and VIKOR Methods

ORIGINALITY REPORT

15%

SIMILARITY INDEX

9%

INTERNET SOURCES

14%

PUBLICATIONS

8%

STUDENT PAPERS

PRIMARY SOURCES

1

Submitted to Universitas Prima Indonesia

Student Paper

7%

2

Akmaludin Akmaludin, Erene Gernaria Sihombing, Linda Sari Dewi, Rinawati Rinawati, Ester Arisawati. "The MOORA method for selecting software App: price-quality ratio approach", SinkrOn, 2021

Publication

3%

3

www2.geog.ucl.ac.uk

Internet Source

1%

4

Akmaludin Akmaludin, Erene Gernaria Sihombing, Linda Sari Dewi, Rinawati Rinawati, Ester Arisawati. "Providing Credit Loans for the Progress of UMKM when Pademik Covid-19 with the Recommended MCDM-Promethee Method", SinkrOn, 2020

Publication

1%

5

Akmaludin, SW Sulistianto, Adjat Sudradjat, Santoso Setiawan, Hendra Supendar, Yopi Handrianto, Rusdiansyah, Tuslaela.

<1%

"Comparison of Job Position Based Promotion Using: VIKOR, ELECTRE And Promethee Method", 2018 Third International Conference on Informatics and Computing (ICIC), 2018

Publication

6

Submitted to Universiti Sains Malaysia

Student Paper

<1 %

7

Akmaludin Akmaludin, Mohammad Badrul. "Multi-criteria for Selection of SmartPhone Brands Product using AHP-TOPSIS Method", SinkrOn, 2019

Publication

<1 %

8

epdf.tips

Internet Source

<1 %

9

iopscience.iop.org

Internet Source

<1 %

10

Christian Antognini. "Chapter 8 Object Statistics", Springer Science and Business Media LLC, 2014

Publication

<1 %

11

Song Liu, Kun Yang. "Study on the knittability of high-performance fiber by using image processing approach", 2010 International Conference on Computer and Information Application, 2010

Publication

<1 %

12

Internet Source

<1 %

13

Embun Fajar Wati, Istikharoh Istikharoh, Tuslaela Tuslaela. "Selection of Outstanding Lecturers with Simple Additive Weighting Method", SinkrOn, 2020

Publication

<1 %

14

Muhd Ridzuan Mansor, Salit Mohd Sapuan. "Concurrent Conceptual Design and Materials Selection of Natural Fiber Composite Products", Springer Science and Business Media LLC, 2018

Publication

<1 %

15

V. Gupta, M. K. Rohil. "Modeling user preferences for vertical handover in 3G-WLAN interworking environment on top of IEEE 802.11u", 2013 3rd IEEE International Advance Computing Conference (IACC), 2013

Publication

<1 %

16

Franek, Jiří, and Aleš Kresta. "Judgment Scales and Consistency Measure in AHP", Procedia Economics and Finance, 2014.

Publication

<1 %

17

moam.info

Internet Source

<1 %

18

www.e3s-conferences.org

Internet Source

<1 %

19

Rani Irma Handayani, Normah Normah, Deni Wironoto. "TOPSIS Method Application in Choosing The Most-Sale POS Cashier Machine Stuffs and Tools in PT. Mahadana Wikasita", SinkrOn, 2021

Publication

<1 %

20

A Akmaludin, Astriana Mulyani, Budi Santoso, Kudiantoro Widiyanto. "Position Based Job Promotion Using Multi-Criteria Elimination VIKOR Method", Journal of Physics: Conference Series, 2019

Publication

<1 %

21

Saaty, T.L.. "Comparison of eigenvalue, logarithmic least squares and least squares methods in estimating ratios", Mathematical Modelling, 1984

Publication

<1 %

Exclude quotes On

Exclude matches Off

Exclude bibliography On



LEMBAGA PENELITIAN DAN PENGABDIAN MASYARAKAT UNIVERSITAS NUSA MANDIRI

SURAT TUGAS 330/B.01/LPPM-UNM/IX/2021

Tentang

PENELITIAN YANG DIPUBLIKASIKAN DALAM JURNAL ILMIAH
Periode September 2021 - Februari 2022

Menulis pada Sinkron : Jurnal dan Penelitian Teknik Informatika, Vol. 6, No. 1, Oktober 2021
(e-ISSN : 2541-2019, p-ISSN : 2541-044X)

Judul :

Selection of the Best Swimming Athletes using MCDM-AHP and VIKOR Methods


- Menimbang :
1. Bahwa perlu diadakan pelaksanaan Tridharma Perguruan Tinggi dalam bentuk Penelitian.
 2. untuk Keperluan pada butir 1 (satu) diatas, maka perlu dibentuk tugas yang berkaitan dengan penelitian yang dipublikasikan dalam Jurnal Ilmiah.

MEMUTUSKAN

- Pertama : Menugaskan kepada saudara
Akmaludin S.Kom, MMSI
Sebagai Penulis yang mempublikasikan Penelitiannya pada Jurnal Ilmiah.
- Kedua : Mempunyai tugas sbb:
Melaksanakan Tugas yang diberikan dengan penuh rasa tanggung jawab.
- Ketiga : Keputusan ini berlaku sejak tanggal ditetapkan, dengan ketentuan apabila dikemudian hari terdapat kekeliruan akan diubah dan diperbaiki sebagaimana mestinya

Jakarta, 1 September 2021

Ketua
Universitas Nusa Mandiri



Andi Saryoko, M.Kom

Tembusan

- Rektor Universitas Nusa Mandiri
- Arsip
- Ybs

LEMBAR
HASIL PENILAIAN SEJAWAT SEBIDANG ATAU PEER REVIEW
KARYA ILMIAH : JURNAL ILMIAH

Judul Artikel Ilmiah : Selection of the Best Swimming Athletes using MCDM-AHP and VIKOR Methods.
 Jumlah Penulis : 5 (lima)
 Status Pengusul : Penulis-1
 Identitas Jurnal Ilmiah :
 a. Nama Jurnal : Sinkron Jurnal Penelitian dan Informatika
 b. Nomor ISSN : e-ISSN: 2541-2019
 c. Vol. No. Bln. Thn : Vol. 6 No. 1 Oktober 2021
 d. Penerbit : Politeknik Ganesha Medan
 e. Jumlah Halaman : 9

Kategori Publikasi Jurnal Ilmiah (beri $\checkmark$ pada kategori yang tepat) :

☐	Jurnal Ilmiah Internasional Berputasi
☐	Jurnal Ilmiah Internasional
☒	Jurnal Ilmiah Nasional Terakreditasi
☐	Jurnal Ilmiah Nasional Tidak Terakreditasi
☐	Jurnal Ilmiah Terindex di DOAJ/lainnya

V. Hasil Penilaian Validasi :

No	Aspek	Uraian/Komentar Penilaian
1	Indikasi Plagiasi	Terindikasi plagiat sebesar 15 %.
2	Linieritas	Sesuai dengan bidang ilmu.

VI. Hasil Penilaian Peer Review:

Komponen Yang Dinilai	Nilai Maksimal Jurnal Ilmiah (isi kolom yang sesuai)					Nilai Akhir Yang Diperoleh
	Internasional Bereputasi	Internasional	Nasional Terakreditasi	Nasional Tidak Terakreditasi	Nasional Terindex DOAJ dll.	
Kelengkapan dan kesesuaian unsur isi jurnal (10%)			2			1,8
Ruang lingkup dan kedalaman pembahasan (30%)			6			5,2
Kecukupan dan kemutakhiran data/informasi dan metodologi (30%)			6			5,8
Kelengkapan unsur dan kualitas Penerbit (30%)			6			5,7
Total = (100%)			20			18,5 x 0,6 = 11,1
Kontribusi pengusul: (contoh: nilai akhir peer X Penulis Pertama = 18 X 60% = (nilai akhir yang diperoleh pengusul)						
Komentar/ Ulasan Peer Review :						
Kelengkapan kesesuaian unsur	Lengkap sesuai dengan ketentuan, sesuai dengan kaidah ilmiah. Latar belakang sudah sesuai dengan kajian penelitian					

Ruang lingkup dan kedalaman pembahasan	Ruang Lingkup jelas pembahasan sesuai dengan judul.
Kecukupan dan kemutakhiran data/informasi dan metodologi	Data Mutakhir Dan Metode sangat jelas
Kelengkapan unsur dan kualitas Penerbit	Lengkap sesuai dengan ketentuan penerbit bertamatis.

Penilai I



Dr. Mochamad Wahyudi, MM. M. Kom, M. Pd

NIDN : 0325057501
 Unit kerja : Universitas Bina Sarana Informatika
 Bidang Ilmu : Ilmu Komputer
 Jabatan Akademik (KUM) : Lektor Kepala 700 (Kum)
 Pendidikan Terakhir : S3

**LEMBAR
HASIL PENILAIAN SEJAWAT SEBIDANG ATAU PEER REVIEW
KARYA ILMIAH : JURNAL ILMIAH**

Judul Artikel Ilmiah : Selection of the Best Swimming Athletes using MCDM-AHP and VIKOR Methods.

Jumlah Penulis : 5 (lima)

Status Pengusul : Penulis-1

Identitas Jurnal Ilmiah :

- a. Nama Jurnal : Sinkron Jurnal Penelitian dan Informatika
- b. Nomor ISSN : e-ISSN: 2541-2019
- c. Vol. No. Bln. Thn : Vol. 6 No. 1 Oktober 2021
- d. Penerbit : Politeknik Ganesha Medan
- e. Jumlah Halaman : 8

Kategori Publikasi Jurnal Ilmiah
(beri √ pada kategori yang tepat) :

- ☐ Jurnal Ilmiah Internasional Berputasi
- ☐ Jurnal Ilmiah Internasional
- ☒ Jurnal Ilmiah Nasional Terakreditasi
- ☐ Jurnal Ilmiah Nasional Tidak Terakreditasi
- ☐ Jurnal Ilmiah Terindex di DOAJ/lainnya

VII. Hasil Penilaian Validasi :

No	Aspek	Uraian/Komentar Penilaian
1	Indikasi Plagiasi	Terindikasi plagiat sebesar 15 %
2	Linieritas	sesuai bidang ilmu komputer

VIII. Hasil Penilaian Peer Review:

Komponen Yang Dinilai	Nilai Maksimal Jurnal Ilmiah (isi kolom yang sesuai)					Nilai Akhir Yang Diperoleh
	Internasional Bereputasi	Internasional	Nasional Terakreditasi	Nasional Tidak Terakreditasi	Nasional Terindex DOAJ dll.	
Kelengkapan dan kesesuaian unsur isi jurnal (10%)			2			2
Ruang lingkup dan kedalaman pembahasan (30%)			6			5,75
Kecukupan dan kemutakhiran data/informasi dan metodologi (30%)			6			5,5
Kelengkapan unsur dan kualitas Penerbit (30%)			6			5,25
Total = (100%)			20			18,5
Kontribusi pengusul: (contoh: nilai akhir peer X Penulis Pertama = 18 X 60% = (nilai akhir yang diperoleh pengusul)						18,5 x 0,6 = 11,1
Komentar/ Ulasan Peer Review :						
Kelengkapan kesesuaian unsur	lengkap, sesuai kaidah penulisan ilmiah					

Ruang lingkup dan kedalaman pembahasan	Pembahasan cukup menarik dan temanya sangat baru
Kecukupan dan kemutakhiran data/informasi dan metodologi	Metode penelitian sudah cukup.
Kelengkapan unsur dan kualitas Penerbit	Kualitas penerbit sudah cukup.

Penilai II



Dr. Dwiza Riana, S.Si, MM, M.Kom.

NIDN : 0322107002
 Unit kerja : Universitas Nusa Mandiri
 Bidang Ilmu : Ilmu Komputer
 Jabatan Akademik (KUM) : Lektor Kepala (Kum)
 Pendidikan Terakhir : S3