

SISFO-BOOKKOST
(SISTEM INFORMASI BOOKING KOST)

Robi Sopandi, M. Kom

Andi Taufik , M. Kom

Mareanus Lase, M. Kom

Muhammad Qomaruddin, M. Kom


Muhamad Tabrani, M. Kom

Suhardi, S. SOS, MM

SISFO-BOOKKOST adalah **SISTEM INFORMASI BOOKING KOST** yang dapat memberikan informasi pemesanan boooking kost sesuai kebutuhan informasi kost mulai dari room kamar kost dan data user pemesan booking kost dengan nama aplikasi **SISFO-BOOKKOST**


Menu User:

Halaman Login

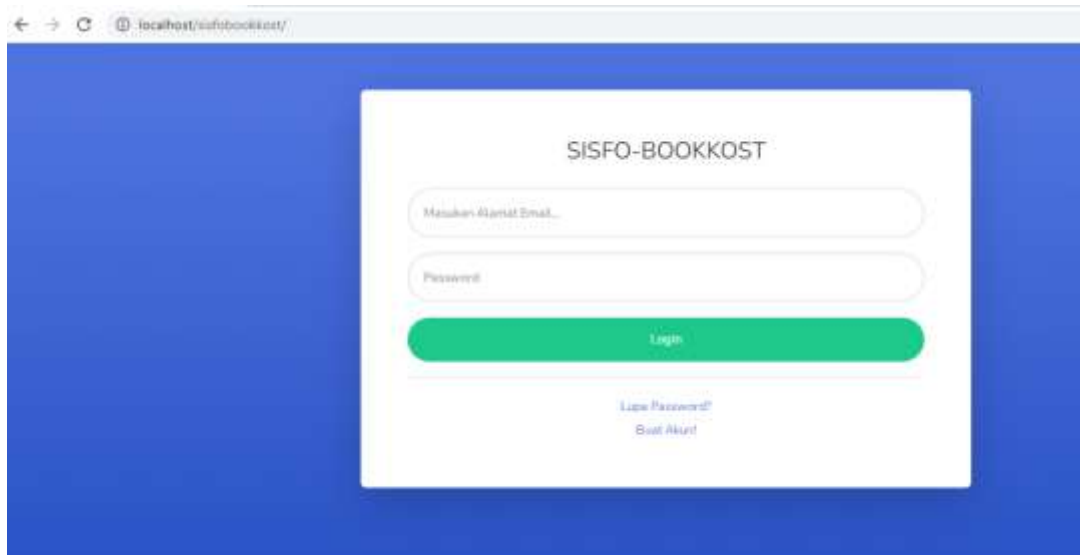


Masukan Alamat email dan Password yang sudah di registrasi atau terdaftar, kemudian klik **Login**

Halaman Registrasi User

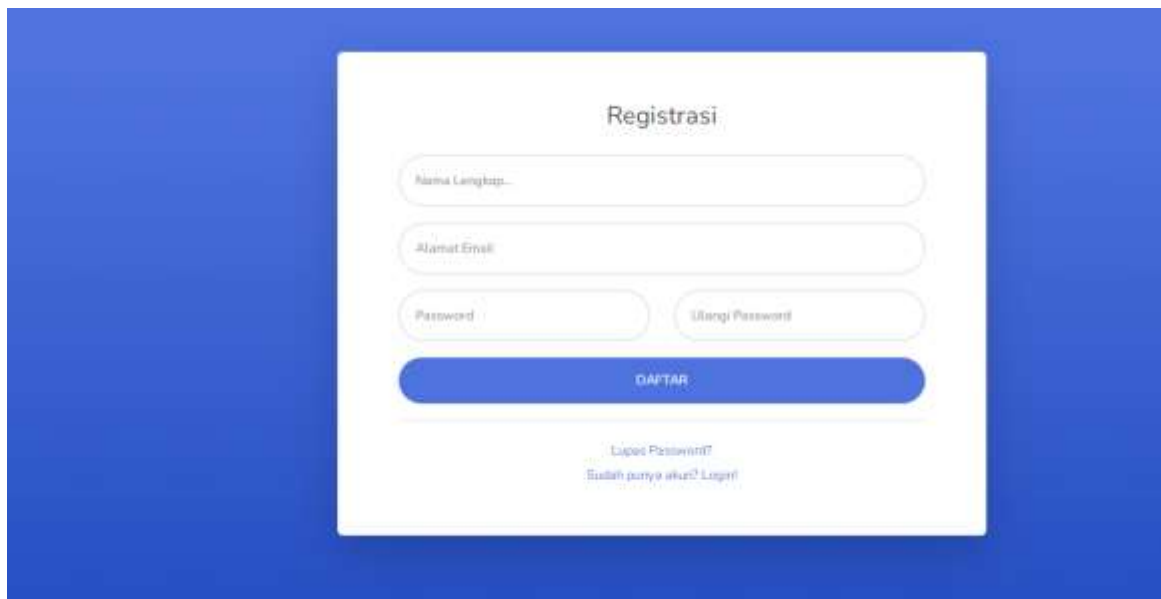

Isi nama lengkap, alamat email, password dan ulangi password, kemudian klik **Daftar**

Beranda Homepage

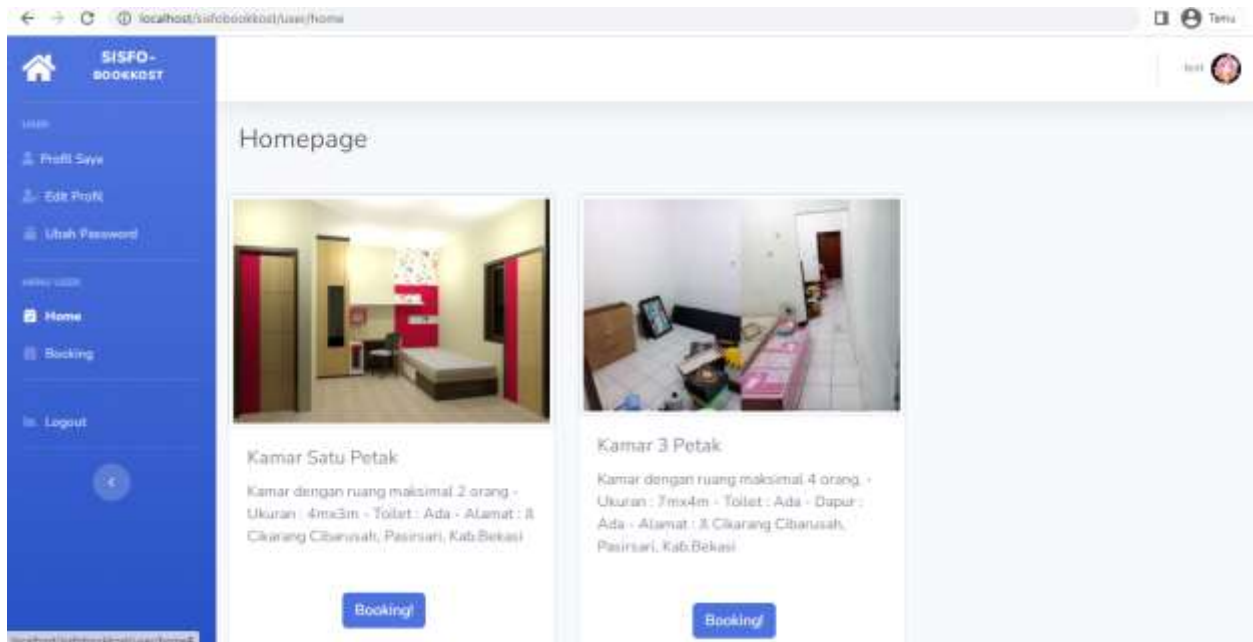


Setelah login tampil daftar kamar kost yang tersedia, pilih klik **booking** untuk memesan kamar kost

Ubah Password



Berfungsi Mengubah password lama dengan password baru, isi password lama, isi password baru dan ulangi password baru, kemudian klik **Ubah Password**

Data Booking

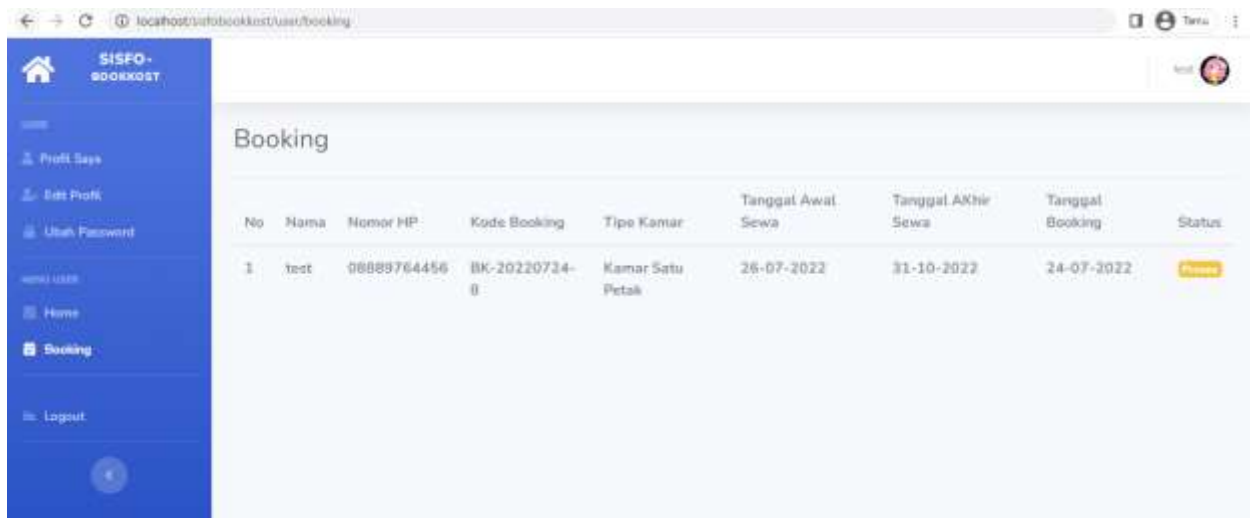


The screenshot shows a web application interface for 'SISFO-BOOKKOST'. The left sidebar contains navigation links: Home, Profile Saya, Edit Profil, Ubah Password, MENU USER (Home, Booking, Logout), and a circular button. The main content area is titled 'Booking' and displays a table of booking data. The table has columns for No, Nama, Nomor HP, Kode Booking, Tipe Kamar, Tanggal Awal Sewa, Tanggal Akhir Sewa, Tanggal Booking, and Status. A single booking record is shown with status 'PENDING'.

No	Nama	Nomor HP	Kode Booking	Tipe Kamar	Tanggal Awal Sewa	Tanggal Akhir Sewa	Tanggal Booking	Status
1	test	08888764456	BK-20220724-8	Kamar Satu Petak	26-07-2022	31-10-2022	24-07-2022	PENDING

Daftar Booking yang sudah terinput

Menu Admin:

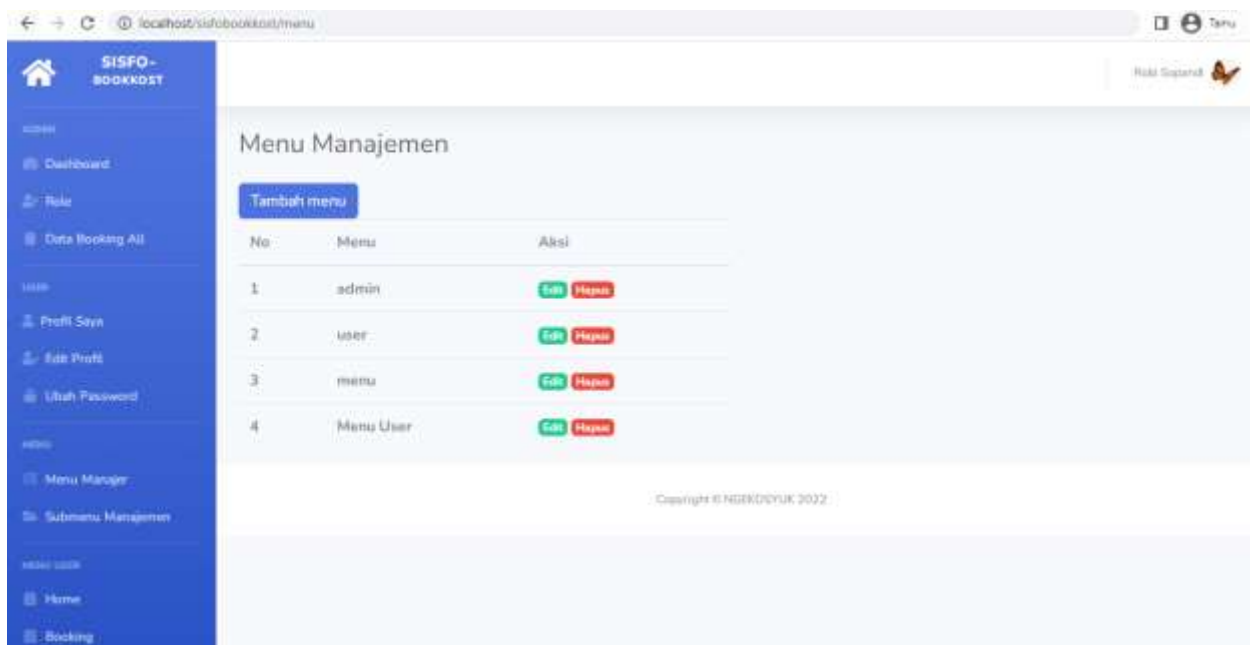

The screenshot shows the admin interface for 'SISFO-BOOKKOST'. The left sidebar contains navigation links: Dashboard, Role, Data Booking All, MENU (Menu Manager, Submenu Manajemen), and MENU USER (Home, Booking). The main content area is titled 'Menu Manajemen' and includes a 'Tambah menu' button and a table of menu items. The table has columns for No, Menu, and Aksi. Four menu items are listed: admin, user, menu, and Menu User, each with 'Edit' and 'Hapus' actions.

No	Menu	Aksi
1	admin	Edit Hapus
2	user	Edit Hapus
3	menu	Edit Hapus
4	Menu User	Edit Hapus

Copyright © NGENDERDYUK 2022

Kode Program

Header.php

```
<!DOCTYPE html>

<html lang="en">

<head>

    <meta charset="utf-8">

    <meta http-equiv="X-UA-Compatible" content="IE=edge">

    <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">

    <meta name="description" content="">

    <meta name="author" content="">

    <title><?= $title; ?> | SISFO-BOOKKOST </title>

    <!-- Custom fonts for this template-->

    <link href="<?= base_url('assets/') ?>vendor/fontawesome-free/css/all.min.css" rel="stylesheet"
    type="text/css">

    <link
    href="https://fonts.googleapis.com/css?family=Nunito:200,200i,300,300i,400,400i,600,600i,700,700i,80
    0,800i,900,900i" rel="stylesheet">

    <!-- Custom styles for this template-->

    <link href="<?= base_url('assets/') ?>css/sb-admin-2.min.css" rel="stylesheet">

</head>

<body id="page-top">
```

```
<!-- Page Wrapper -->
```

```
<div id="wrapper">
```

Footer.php

```
<!-- Footer -->
```

```
<footer class="sticky-footer bg-white">
```

```
<div class="container my-auto">
```

```
<div class="copyright text-center my-auto">
```

```
<span>Copyright &copy; sisfobookkost 2022</span>
```

```
</div>
```

```
</div>
```

```
</footer>
```

```
<!-- End of Footer -->
```

```
</div>
```

```
<!-- End of Content Wrapper -->
```

```
</div>
```

```
<!-- End of Page Wrapper -->
```

```
<!-- Scroll to Top Button-->
```

```
<a class="scroll-to-top rounded" href="#page-top">
```

```
<i class="fas fa-angle-up"></i>
```

```
</a>
```

```
<!-- Logout Modal-->
```

```
<div class="modal fade" id="logoutModal" tabindex="-1" role="dialog" aria-  
labelledby="exampleModalLabel" aria-hidden="true">
```

```
<div class="modal-dialog" role="document">
```

```
<div class="modal-content">
```

```

<div class="modal-header">
    <h5 class="modal-title" id="exampleModalLabel">Yakin ingin keluar?</h5>
    <button class="close" type="button" data-dismiss="modal" aria-label="Close">
        <span aria-hidden="true">x</span>
    </button>
</div>

<div class="modal-body">Tekan "Logout" dibawah jika kamu sudah yakin dan ingin
mengakhiri sesi kamu saat ini.</div>

<div class="modal-footer">
    <button class="btn btn-secondary" type="button" data-
dismiss="modal">Cancel</button>

    <a class="btn btn-primary" href="<?= base_url('auth/logout') ?>">Logout</a>
</div>
</div>
</div>
</div>

<!-- Bootstrap core JavaScript-->
<script src="<?= base_url('assets/') ?>vendor/jquery/jquery.min.js"></script>
<script src="<?= base_url('assets/') ?>vendor/bootstrap/js/bootstrap.bundle.min.js"></script>

<!-- Core plugin JavaScript-->
<script src="<?= base_url('assets/') ?>vendor/jquery-easing/jquery.easing.min.js"></script>

<!-- Custom scripts for all pages-->
<script src="<?= base_url('assets/') ?>js/sb-admin-2.min.js"></script>

<script>
    $('.custom-file-input').on('change', function() {

```

```

        let fileName = $(this).val().split('\\').pop();

        $(this).next('.custom-file-label').addClass("selected").html(fileName);
    });

    $('.form-check-input').on('click', function() {
        const menuId = $(this).data('menu');
        const roleId = $(this).data('role');

        $.ajax({
            url: "<?= base_url('admin/changeaccess'); ?>",
            type: 'post',
            data: {
                menuId: menuId,
                roleId: roleId
            },
            success: function() {
                document.location.href = "<?= base_url('admin/roleaccess/'); ?>" + roleId
            }
        });
    });
</script>

</body>

</html>

```

Sidebar.php

```

<!-- Sidebar -->

<ul class="navbar-nav bg-gradient-primary sidebar sidebar-dark accordion" id="accordionSidebar">

```



```

<!-- Sidebar - Brand -->
<a class="sidebar-brand d-flex align-items-center justify-content-center" href="#">
    <div class="sidebar-brand-icon ">
        <i class="fas fa-home"></i>
    </div>
    <div class="sidebar-brand-text mx-3">SISFO- <sup>BOOKKOST</sup></sup></sup></div>
</a>

```

```

<!-- Divider -->
<hr class="sidebar-divider">

```

```

<!-- QUERY MENU -->

```

```

<?php

```

```

$role_id = $this->session->userdata('role_id');
$queryMenu = "SELECT `user_menu`.`id`,`menu`
                FROM `user_menu`
                JOIN `user_access_menu`
                ON `user_menu`.`id` = `user_access_menu`.`menu_id`
                WHERE `user_access_menu`.`role_id` = $role_id
                ORDER BY `user_access_menu`.`menu_id` ASC";

```

```

$menu = $this->db->query($queryMenu)->result_array();
?>

```

```

<!-- LOOPING MENU -->
<?php foreach ($menu as $m) : ?>
    <div class="sidebar-heading">

```

```

        <?= $m['menu']; ?>
    </div>

<!-- SUB MENU SESUAI MENU -->
<?php
$menuId = $m['id'];
$querySubMenu = "SELECT *
                FROM `user_sub_menu`
                WHERE `menu_id` = $menuId
                AND `is_active` = 1";

$subMenu = $this->db->query($querySubMenu)->result_array();
?>

<?php foreach ($subMenu as $sm) : ?>
    <?php if ($title == $sm['title']) : ?>
        <li class="nav-item active">

        <?php else : ?>
            <li class="nav-item ">
        <?php endif; ?>
        <a class="nav-link pb-0" href="<?= base_url($sm['url']); ?>">
            <i class="<?= $sm['icon']; ?>"></i>
            <span><?= $sm['title']; ?></span></a>
        </li>
    <?php endforeach ?>
    <!-- Divider -->
    <hr class="sidebar-divider mt-3">
<?php endforeach; ?>

```

```

<li class="nav-item">
  <a class="nav-link" href="#" data-toggle="modal" data-target="#logoutModal">
    <i class="fas fa-fw fa-chart-area"></i>
    <span>Logout</span></a>
</li>

```

```

<!-- Divider -->
<hr class="sidebar-divider d-none d-md-block">

```

```

<!-- Sidebar Toggler (Sidebar) -->
<div class="text-center d-none d-md-inline">
  <button class="rounded-circle border-0" id="sidebarToggle"></button>
</div>

```

```

</ul>
<!-- End of Sidebar -->

```

Login.php

```

<div class="container">

  <!-- Outer Row -->
  <div class="row justify-content-center">

    <div class="col-lg-7">
      <!-- Kontener Putih -->
      <div class="card o-hidden border-0 shadow-lg my-5">
        <div class="card-body p-0">

```

<!-- Nested Row within Card Body -->

<div class="row">

<!-- row didalam kontener -->

<div class="col-lg">

<div class="p-5">

<div class="text-center">

<h1 class="h4 text-gray-900 mb-4">SISFO-BOOKKOST </h1>

</div>

<?= \$this->session->flashdata('message'); ?>

<form class="user" method="POST" action="<?= base_url('auth/') ?>">

<div class="form-group">

<input type="text" class="form-control form-control-user" name='email'
id="email" placeholder="Masukan Alamat Email..." value="<?= set_value('email'); ?>">

<?= form_error('email', '<small class="text-danger pl-3">', '</small>') ?>

</div>

<div class="form-group">

<input type="password" class="form-control form-control-user"
name="password" id="password" placeholder="Password">

<?= form_error('password', '<small class="text-danger pl-3">', '</small>') ?>

</div>

<button type="submit" class="btn btn-success btn-user btn-block">

Login

</button>

</form>

<hr>

<div class="text-center">

```

        <a class="small" href="https://wa.me/081280009993">Lupa Password?</a>
    </div>

    <div class="text-center">
        <a class="small" href="{?= base_url('auth/pendaftaran'); ?}">Buat Akun!</a>
    </div>
</div>
</div>
</div>
</div>
</div>
</div>
</div>

</div>

</div>

</div>

```

pendaftaran.php

```

<body class="bg-gradient-primary">

    <div class="container">

        <div class="card o-hidden border-0 shadow-lg my-5 col-lg-7 mx-auto">
            <div class="card-body p-0">
                <!-- Nested Row within Card Body -->
                <div class="row">
                    <div class="col-lg">
                        <div class="p-5">
                            <div class="text-center">
                                <h1 class="h4 text-gray-900 mb-4">Registrasi</h1>

```

```
</div>
```

```
<!-- Form Pendaftaran -->
```

```
<form class="user" method="POST" action="{%= base_url('auth/pendaftaran') %}">
```

```
  <div class="form-group">
```

```
    <input type="text" class="form-control form-control-user" name="nama" id="nama"
placeholder="Nama Lengkap..." value="{%= set_value('nama') %}">
```

```
    {%= form_error('nama', '<small class="text-danger pl-3">', '</small>') %}
```

```
  </div>
```

```
  <div class="form-group">
```

```
    <input type="text" class="form-control form-control-user" name="email" id="email"
placeholder="Alamat Email" value="{%= set_value('email') %}">
```

```
    {%= form_error('email', '<small class="text-danger pl-3">', '</small>') %}
```

```
  </div>
```

```
<div class="form-group row">
```

```
  <div class="col-sm-6 mb-3 mb-sm-0">
```

```
    <input type="password" class="form-control form-control-user"
name="password1" id="password1" placeholder="Password">
```

```
    {%= form_error('password1', '<small class="text-danger pl-3">', '</small>') %}
```

```
  </div>
```

```
  <div class="col-sm-6">
```

```
    <input type="password" class="form-control form-control-user"
name="password2" id="password2" placeholder="Ulangi Password">
```

```
  </div>
```

```
</div>
```

```
<button type="submit" class="btn btn-primary btn-user btn-block">
```

```
  DAFTAR
```

```
</button>
```

```
</form>
```

```
<hr>
```

```

        <div class="text-center">
            <a class="small" href="https://wa.me/08889764456">Lupa Password?</a>
        </div>

        <div class="text-center">
            <a class="small" href="<?= base_url('auth'); ?>">Sudah punya akun? Login!</a>
        </div>
    </div>
</div>
</div>
</div>
</div>
</div>

```

```
</div>
```

Top_bar.php

```

<!-- Content Wrapper -->
<div id="content-wrapper" class="d-flex flex-column">

    <!-- Main Content -->
    <div id="content">

        <!-- Topbar -->
        <nav class="navbar navbar-expand navbar-light bg-white topbar mb-4 static-top shadow">

            <!-- Sidebar Toggle (Topbar) -->
            <button id="sidebarToggleTop" class="btn btn-link d-md-none rounded-circle mr-3">
                <i class="fa fa-bars"></i>
            </button>

            <!-- Topbar Navbar -->

```

```

<ul class="navbar-nav ml-auto">

    <div class="topbar-divider d-none d-sm-block"></div>

    <!-- Nav Item - User Information -->
    <li class="nav-item dropdown no-arrow">
        <a class="nav-link dropdown-toggle" href="#" id="userDropdown" role="button" data-
toggle="dropdown" aria-haspopup="true" aria-expanded="false">
            <span class="mr-2 d-none d-lg-inline text-gray-600 small"><?= $user['name']
?></span>
            
        </a>
        <!-- Dropdown - User Information -->
        <div class="dropdown-menu dropdown-menu-right shadow animated--grow-in" aria-
labelledby="userDropdown">
            <a class="dropdown-item" href="<?= base_url('user') ?>">
                <i class="fas fa-user fa-sm fa-fw mr-2 text-gray-400"></i>
                Profile
            </a>
            <div class="dropdown-divider"></div>
            <a class="dropdown-item" href="#" data-toggle="modal" data-
target="#logoutModal">
                <i class="fas fa-sign-out-alt fa-sm fa-fw mr-2 text-gray-400"></i>
                Logout
            </a>
        </div>
    </li>

</ul>

```



```
</nav>
```

```
<!-- End of Topbar -->
```

bookingAll.php

```
<!-- Begin Page Content -->
```

```
<div class="container-fluid">
```

```
<!-- Page Heading -->
```

```
<h1 class="h3 mb-4 text-gray-800"><?= $title; ?></h1>
```

```
<div class="row">
```

```
<div class="col-lg-12">
```

```
<table class="table table-hover">
```

```
<thead>
```

```
<tr>
```

```
<th scope="col">No</th>
```

```
<th scope="col">Nama</th>
```

```
<th scope="col">Email</th>
```

```
<th scope="col">Nomor HP</th>
```

```
<th scope="col">Kode Booking</th>
```

```
<th scope="col">Tipe Kamar</th>
```

```
<th scope="col">Tanggal Awal Sewa</th>
```

```
<th scope="col">Tanggal Akhir Sewa</th>
```

```
<th scope="col">Tanggal Booking</th>
```

```
<th scope="col">Status</th>
```

```
</tr>
```

```
</thead>
```

```
<tbody>
```

```

<?php
$no = 1;
foreach ($final_booking as $fb) : ?>
    <tr>
        <th scope="col"><?=$no; ?></th>
        <th scope="col"><?=$fb['name'] ?></th>
        <th scope="col"><?=$fb['email'] ?></th>
        <th scope="col"><?=$fb['num_hp'] ?></th>
        <th scope="col"><?=$fb['no_register'] ?></th>
        <th scope="col"><?=$fb['room_name'] ?></th>
        <th scope="col"><?=$fb['date_start']; ?></th>
        <th scope="col"><?=$fb['date_end']; ?></th>
        <th scope="col"><?=$fb['date_bk']; ?></th>
        <th scope="col">
            <?php if ($fb['status_bk'] == '1') : ?>
                <a href="<?=$fb['base_url'].'/admin/editBooking/' . $fb['id_booking']; ?>" class="badge badge-success">Selesai</a>
            <?php elseif ($fb['status_bk'] == '2') : ?>
                <a href="<?=$fb['base_url'].'/admin/editBooking/' . $fb['id_booking']; ?>" class="badge badge-warning">Proses</a>
            <?php elseif ($fb['status_bk'] == '0') : ?>
                <a href="<?=$fb['base_url'].'/admin/editBooking/' . $fb['id_booking']; ?>" class="badge badge-danger">Cancel</a>
            <?php endif; ?>
        </th>
    </tr>
    <?php $no = $no + 1;
endforeach; ?>
</tbody>
</table>

```

```
</div>
```

```
</div>
```

```
</div>
```

```
<!-- /.container-fluid -->
```

```
</div>
```

```
<!-- End of Main Content -->
```

editBooking.php

```
<!-- Begin Page Content -->
```

```
<div class="container-fluid">
```

```
<!-- Page Heading -->
```

```
<h1 class="h3 mb-4 text-gray-800"><?= $title; ?></h1>
```

```
<?= form_open_multipart('admin/editBooking/' . $id_bk); ?>
```

```
<div class="row-mb">
```

```
<div class="form-group">
```

```
<div class="col-sm-8 my-4">
```

```
<div class="row mb-3">
```

```
<label for="title" class="col-sm-3 col-form-label">No Register</label>
```

```
<div class="col-sm-9">
```

```
<input readonly type="text" class="form-control" id="noreg" name="noreg" value="<?= $bk['no_register']; ?>">
```

```
<?= form_error('title', '<small class="text-danger pl-1">', '</small>') ?>
```

```
</div>
```

```
</div>
```

```

</div>

<div class="col-sm-8 my-4">

  <div class="row mb-3">

    <label for="stat_bk" class="col-sm-3 col-form-label">Status</label>

    <div class="col-sm-9">

      <select name="stat_bk" id="stat_bk" class="form-control">

        <option value="<?= $bk['status_bk']; ?>">Select Status</option>

        <option value=1>Selesai</option>

        <option value=2>Proses</option>

        <option value=0>Cancel</option>

      </select>

      <?= form_error('stat_bk', '<small class="text-danger pl-1">', '</small>') ?>

    </div>

  </div>

</div>

<div class="row">

  <div class="col-sm-6 my-3">

    <button type="submit" class="btn btn-primary">Update</button>

  </div>

</div>

</div>

</div>

</div>

```

editRole.php

```

<!-- Begin Page Content -->

<div class="container-fluid">

  <!-- Page Heading -->

  <h1 class="h3 mb-4 text-gray-800"><?= $title; ?></h1>

```

```

<?= form_open_multipart('admin/editRole/' . $role_id); ?>

<div class="row">
    <div class="col-lg-6">
        <div class="row mb-3">
            <label for="name_role" class="col-sm-3 col-form-label">Nama Role</label>
            <div class="col-sm-9">
                <input type="text" class="form-control" id="name_role" name="name_role" value="<?=
$role['role']; ?>">
                <?= form_error('name_role', '<small class="text-danger pl-1">', '</small>') ?>
            </div>
        </div>
    </div>
    <div class="row">
        <div class="col-sm-6 my-3">
            <button type="submit" class="btn btn-primary">Update</button>
        </div>
    </div>
</div>

```

editRoom.php

```

<!-- Begin Page Content -->
<div class="container-fluid">

    <!-- Page Heading -->
    <h1 class="h3 mb-4 text-gray-800"><?= $title; ?></h1>

    <?= form_open_multipart('admin/editRoom/' . $room_id); ?>

```

```

<div class="row">
  <div class="col-lg-6">
    <div class="row mb-3">
      <label for="name_room" class="col-sm-3 col-form-label">Nama Room</label>
      <div class="col-sm-9">
        <input type="text" class="form-control" id="name_room" name="name_room" value="<?=$room['room_name']; ?>">
        <?=$form_error('name_room', '<small class="text-danger pl-1">', '</small>') ?>
      </div>
    </div>
    <div class="row mb-3">
      <label for="code_room" class="col-sm-3 col-form-label">Kode Room</label>
      <div class="col-sm-9">
        <input type="text" class="form-control" id="code_room" name="code_room" value="<?=$room['room_code']; ?>">
        <?=$form_error('code_room', '<small class="text-danger pl-1">', '</small>') ?>
      </div>
    </div>
    <div class="row mb-3">
      <label for="desc_room" class="col-sm-3 col-form-label">Keterangan</label>
      <div class="col-sm-9">
        <textarea type="text" class="form-control" id="desc_room" name="desc_room"><?=$room['room_desc']; ?></textarea>
        <?=$form_error('desc_room', '<small class="text-danger pl-1">', '</small>') ?>
      </div>
    </div>
    <div class="row mb-3">
      <label for="cost_room" class="col-sm-3 col-form-label">Harga Sewa</label>
      <div class="col-sm-9">

```

```

        <input type="text" class="form-control" id="cost_room" name="cost_room" value="<?=$room['room_cost']; ?>">
        <? = form_error('cost_room', '<small class="text-danger pl-1">', '</small>') ?>
    </div>
</div>
<div class="row mb-3">
    <label for="status_room" class="col-sm-3 col-form-label">Status</label>
    <div class="col-sm-9">
        <select name="status_room" id="status_room" class="form-control">
            <option value="<? $room['room_status']; ?>">Pilih Status</option>
            <option value=1>Aktif</option>
            <option value=0>Non Aktif</option>
        </select>
    </div>
</div>
<div class="row mb-3">
    <div class="col-sm-3">Foto</div>
    <div class="col-sm-9">
        <div class="row">
            <div class="col-sm-3">
                
            </div>
            <div class="col-sm-9">
                <div class="mb-3">
                    <div class="custom-file">
                        <input type="file" class="custom-file-input" id="image_room"
name="image_room">
                        <label class="custom-file-label" for="image_room">Pilih Foto</label>
                    </div>
                </div>
            </div>
        </div>
    </div>
</div>

```

```

        </div>
    </div>

    <div class="row">
        <div class="col-sm-6 my-3">
            <button type="submit" class="btn btn-primary">Update</button>
        </div>
        <div class="col-sm-6 my-3">
            <a type="submit" class="btn btn-danger" data-toggle="modal" data-
target="#deleteroom">Delete</a>
        </div>
    </div>
</div>
</div>
</div>
</div>
</div>
</div>
</div>

<!-- Delete Room Modal-->
<div class="modal fade" id="deleteroom" tabindex="-1" role="dialog" aria-labelledby="deleteroom"
aria-hidden="true">
    <div class="modal-dialog" role="document">
        <div class="modal-content">
            <div class="modal-header">
                <h5 class="modal-title" id="deleteroom">Yakin ingin hapus data?</h5>
                <button class="close" type="button" data-dismiss="modal" aria-label="Close">
                    <span aria-hidden="true">x</span>
                </button>
            </div>

```



```

</div>

<div class="modal-body">Tekan "Delete" dibawah jika kamu sudah yakin.</div>

<div class="modal-footer">

    <button class="btn btn-secondary" type="button" data-dismiss="modal">Cancel</button>

    <a class="btn btn-primary" href="<?= base_url('admin/deleteroom/' . $room_id)
?>">Delete</a>

</div>

</div>

</div>

</div>

```

role.php

```

<!-- Begin Page Content -->

<div class="container-fluid">

    <!-- Page Heading -->

    <h1 class="h3 mb-4 text-gray-800"><?= $title; ?></h1>

    <div class="row">

        <div class="col-lg-6">

            <?= form_error('menu', '<div class="alert alert-danger" role="alert">', '</div>') ?>

            <?= $this->session->flashdata('message'); ?>

            <a href="" class="btn btn-primary" data-toggle="modal" data-target="#newRoleAdd">

                Tambah Role

            </a>

            <table class="table table-hover">

                <thead>

```

```

        <tr>
            <th scope="col">No</th>
            <th scope="col">Role</th>
            <th scope="col">Aksi</th>
        </tr>
    </thead>
    <tbody>
        <?php
            $no = 1;
            foreach ($role as $r) : ?>
                <tr>
                    <th scope="col"><?= $no; ?></th>
                    <th scope="col"><?= $r['role'] ?></th>
                    <th scope="col">
                        <a href="<?= base_url('admin/roleaccess/') . $r['id']; ?>" class="badge badge-
success">Kuasa</a>
                        <a href="<?= base_url('admin/editRole/') . $r['id']; ?>" class="badge badge-
success">Edit</a>
                        <a href="<?= base_url('admin/roledetele/') . $r['id']; ?>" class="badge badge-danger"
data-toggle="modal" data-target="#deleteRole">Hapus</a>
                    </th>
                </tr>
                <?php $no = $no + 1;
            endforeach; ?>
        </tbody>
    </table>

</div>
</div>

```

```
</div>
```

```
<!-- /.container-fluid -->
```

```
<!-- Modal Add-->
```

```
<div class="modal fade" id="newRoleAdd" tabindex="-1" aria-labelledby="newRoleAddLabel" aria-hidden="true">
```

```
  <div class="modal-dialog">
```

```
    <div class="modal-content">
```

```
      <div class="modal-header">
```

```
        <h5 class="modal-title" id="newRoleAddLabel">Tambah Role</h5>
```

```
        <button type="button" class="btn-close" data-dismiss="modal" aria-label="Close"></button>
```

```
      </div>
```

```
      <form action="{%= base_url("admin/addRole/"); %}" method="POST">
```

```
        <div class="modal-body">
```

```
          <div class="form-group">
```

```
            <input type="text" class="form-control" id="name_role" name="name_role"
placeholder="Nama role">
```

```
          </div>
```

```
        </div>
```

```
        <div class="modal-footer">
```

```
          <button type="button" class="btn btn-secondary" data-dismiss="modal">Batal</button>
```

```
          <button type="submit" class="btn btn-primary">Tambahkan</button>
```

```
        </div>
```

```
      </form>
```

```
    </div>
```

```
  </div>
```

```
</div>
```

```
<!-- Modal Hapus Role -->
```

```
<div class="modal fade" id="deleteRole" tabindex="-1" aria-labelledby="deleteRole" aria-hidden="true">
```

```

<div class="modal-dialog">
  <div class="modal-content">
    <div class="modal-header">
      <h5 class="modal-title" id="deleteroom">Yakin ingin hapus data?</h5>
      <button class="close" type="button" data-dismiss="modal" aria-label="Close">
        <span aria-hidden="true">x</span>
      </button>
    </div>
    <div class="modal-body">
      <p>apakah anda yakin ingin menghapus role <?= $r['role']; ?></p>
      <div class="modal-footer">
        <button class="btn btn-secondary" type="button" data-dismiss="modal">Cancel</button>
        <a class="btn btn-primary" href="<?= base_url('admin/deleteRole/' . $r['id']) ?>">Delete</a>
      </div>
    </div>
  </div>
</div>

```

roleaccess.php

```

<!-- Begin Page Content -->
<div class="container-fluid">

  <!-- Page Heading -->
  <h1 class="h3 mb-4 text-gray-800"><?= $title; ?></h1>

  <div class="row">
    <div class="col-lg-6">

      <?= $this->session->flashdata('message'); ?>
    </div>
  </div>

```

```
<h5>Role : <?= $role['role']; ?>
```

```
<table class="table table-hover">
  <thead>
    <tr>
      <th scope="col">No</th>
      <th scope="col">Menu</th>
      <th scope="col">Akses</th>
    </tr>
  </thead>
  <tbody>
    <?php
      $no = 1;
      foreach ($menu as $m) : ?>
        <tr>
          <th scope="col"><?= $no; ?></th>
          <th scope="col"><?= $m['menu'] ?></th>
          <th scope="col">
            <div class="form-check">
              <input class="form-check-input" type="checkbox" <?=
salmanxfxa_check_access($role['id'], $m['id']); ?> data-role="<?= $role['id']; ?>" data-menu="<?=
$m['id']; ?>">
            </div>
          </th>
        </tr>
        <?php $no = $no + 1;
      endforeach; ?>
    </tbody>
```

```
</table>
```

```
</div>
```

```
</div>
```

```
</div>
```

```
<!-- /.container-fluid -->
```

```
</div>
```

```
<!-- End of Main Content -->
```

booking_model.php

```
<?php
```

```
defined('BASEPATH') or exit('No direct script access allowed');
```

```
class booking_model extends CI_Model
```

```
{
```

```
    public function data_bk()
```

```
    {
```

```
        $this->db->select('*');
```

```
        $this->db->from('booking');
```

```
        $this->db->join('user', 'user.id = booking.id_user');
```

```
        $this->db->join('room', 'room.id = booking.id_room');
```

```
        return $this->db->get("");
```

```
    }
```

```
}
```

auth_footer.php

```
<!-- Bootstrap core JavaScript-->
```

```
<script src="<?= base_url('assets/'); ?>vendor/jquery/jquery.min.js"></script>
```

```
<script src="vendor/bootstrap/js/bootstrap.bundle.min.js"></script>
```

```
<!-- Core plugin JavaScript-->
```

```
<script src="<?= base_url('assets/'); ?>vendor/jquery-easing/jquery.easing.min.js"></script>
```

```
<!-- Custom scripts for all pages-->
```

```
<script src="<?= base_url('assets/'); ?>js/sb-admin-2.min.js"></script>
```

```
</body>
```

```
</html>
```

Auth_header.php

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
<meta charset="utf-8">
```

```
<meta http-equiv="X-UA-Compatible" content="IE=edge">
```

```
<meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
```

```
<meta name="description" content="">
```

```
<meta name="author" content="">
```

```
<title><?= $title; ?></title>
```

```
<!-- Custom fonts for this template-->
```

```
<link href="<?= base_url('assets/'); ?>vendor/fontawesome-free/css/all.min.css" rel="stylesheet" type="text/css">
```

```
<link
```

```
href="https://fonts.googleapis.com/css?family=Nunito:200,200i,300,300i,400,400i,600,600i,700,700i,800,800i,900,900i" rel="stylesheet">
```

```
<!-- Custom styles for this template-->
```

```
<link href="<?= base_url('assets/'); ?>css/sb-admin-2.min.css" rel="stylesheet">
```

```
</head>
```

```
<body class="bg-gradient-primary">
```

Config.php

```
<?php
```

```
defined('BASEPATH') or exit('No direct script access allowed');
```

```
/*
```

```
|-----
```

```
| Base Site URL
```

```
|-----
```

```
|
```

```
| URL to your CodeIgniter root. Typically this will be your base URL,
```

```
| WITH a trailing slash:
```

```
|
```

```
|          http://example.com/
```

```
|
```

```
| WARNING: You MUST set this value!
```

```
|
```

```
| If it is not set, then CodeIgniter will try to guess the protocol and
```

```
| path to your installation, but due to security concerns the hostname will
```

```
| be set to $_SERVER['SERVER_ADDR'] if available, or localhost otherwise.
```

```
| The auto-detection mechanism exists only for convenience during
```

```
| development and MUST NOT be used in production!
```



```
|  
| If you need to allow multiple domains, remember that this file is still  
| a PHP script and you can easily do that on your own.  
|  
*/  
$config['base_url'] = 'http://localhost/sisfobookkost';  
  
/*  
|-----  
| Index File  
|-----  
|  
| Typically this will be your index.php file, unless you've renamed it to  
| something else. If you are using mod_rewrite to remove the page set this  
| variable so that it is blank.  
|  
*/  
$config['index_page'] = '';  
  
/*  
|-----  
| URI PROTOCOL  
|-----  
|  
| This item determines which server global should be used to retrieve the  
| URI string. The default setting of 'REQUEST_URI' works for most servers.  
| If your links do not seem to work, try one of the other delicious flavors:  
|  
| 'REQUEST_URI'  Uses $_SERVER['REQUEST_URI']
```

```
| 'QUERY_STRING' Uses $_SERVER['QUERY_STRING']
| 'PATH_INFO' Uses $_SERVER['PATH_INFO']
|
| WARNING: If you set this to 'PATH_INFO', URIs will always be URL-decoded!
*/
$config['uri_protocol'] = 'REQUEST_URI';
```

```
/*
|-----
| URL suffix
|-----
|
| This option allows you to add a suffix to all URLs generated by CodeIgniter.
| For more information please see the user guide:
|
| https://codeigniter.com/userguide3/general/urls.html
|
| Note: This option is ignored for CLI requests.
*/
$config['url_suffix'] = '';
```

```
/*
|-----
| Default Language
|-----
|
| This determines which set of language files should be used. Make sure
| there is an available translation if you intend to use something other
| than english.
```

```
|  
*/  
$config['language'] = 'english';  
  
/*  
|-----  
| Default Character Set  
|-----  
|  
| This determines which character set is used by default in various methods  
| that require a character set to be provided.  
|  
| See http://php.net/htmlspecialchars for a list of supported charsets.  
|  
*/  
$config['charset'] = 'UTF-8';  
  
/*  
|-----  
| Enable/Disable System Hooks  
|-----  
|  
| If you would like to use the 'hooks' feature you must enable it by  
| setting this variable to TRUE (boolean). See the user guide for details.  
|  
*/  
$config['enable_hooks'] = FALSE;  
  
/*
```

```

|-----
| Class Extension Prefix
|-----
|
| This item allows you to set the filename/classname prefix when extending
| native libraries. For more information please see the user guide:
|
| https://codeigniter.com/userguide3/general/core\_classes.html
| https://codeigniter.com/userguide3/general/creating\_libraries.html
|
| */
$config['subclass_prefix'] = 'MY_';

```

```

/*
|-----
| Composer auto-loading
|-----
|
| Enabling this setting will tell CodeIgniter to look for a Composer
| package auto-loader script in application/vendor/autoload.php.
|
|
|           $config['composer_autoload'] = TRUE;
|
|
| Or if you have your vendor/ directory located somewhere else, you
| can opt to set a specific path as well:
|
|           $config['composer_autoload'] = '/path/to/vendor/autoload.php';
|
| For more information about Composer, please visit http://getcomposer.org/

```

```

|
| Note: This will NOT disable or override the CodeIgniter-specific
|         autoloading (application/config/autoload.php)
|
*/
$config['composer_autoload'] = FALSE;

/*
|-----
| Allowed URL Characters
|-----
|
| This lets you specify which characters are permitted within your URLs.
| When someone tries to submit a URL with disallowed characters they will
| get a warning message.
|
| As a security measure you are STRONGLY encouraged to restrict URLs to
| as few characters as possible. By default only these are allowed: a-z 0-9~%.:_-
|
| Leave blank to allow all characters -- but only if you are insane.
|
| The configured value is actually a regular expression character group
| and it will be executed as: ! preg_match('/^[<permitted_uri_chars>]+$'/i
|
| DO NOT CHANGE THIS UNLESS YOU FULLY UNDERSTAND THE REPERCUSSIONS!!
|
*/
$config['permitted_uri_chars'] = 'a-z 0-9~%.:_-\'';

/*

```

```

|-----
| Enable Query Strings
|-----
|
| By default CodeIgniter uses search-engine friendly segment based URLs:
| example.com/who/what/where/
|
| You can optionally enable standard query string based URLs:
| example.com?who=me&what=something&where=here
|
| Options are: TRUE or FALSE (boolean)
|
| The other items let you set the query string 'words' that will
| invoke your controllers and its functions:
| example.com/index.php?c=controller&m=function
|
| Please note that some of the helpers won't work as expected when
| this feature is enabled, since CodeIgniter is designed primarily to
| use segment based URLs.
|
|*/
$config['enable_query_strings'] = FALSE;
$config['controller_trigger'] = 'c';
$config['function_trigger'] = 'm';
$config['directory_trigger'] = 'd';

/*
|-----
| Allow $_GET array

```

```

|-----
|
| By default CodeIgniter enables access to the $_GET array. If for some
| reason you would like to disable it, set 'allow_get_array' to FALSE.
|
| WARNING: This feature is DEPRECATED and currently available only
|     for backwards compatibility purposes!
|
| */
$config['allow_get_array'] = TRUE;

/*
|-----
| Error Logging Threshold
|-----
|
| You can enable error logging by setting a threshold over zero. The
| threshold determines what gets logged. Threshold options are:
|
|         0 = Disables logging, Error logging TURNED OFF
|         1 = Error Messages (including PHP errors)
|         2 = Debug Messages
|         3 = Informational Messages
|         4 = All Messages
|
| You can also pass an array with threshold levels to show individual error types
|
|         array(2) = Debug Messages, without Error Messages
|

```

| For a live site you'll usually only enable Errors (1) to be logged otherwise

| your log files will fill up very fast.

|

*/

```
$config['log_threshold'] = 0;
```

/*

|-----

| Error Logging Directory Path

|-----

|

| Leave this BLANK unless you would like to set something other than the default

| application/logs/ directory. Use a full server path with trailing slash.

|

*/

```
$config['log_path'] = '';
```

/*

|-----

| Log File Extension

|-----

|

| The default filename extension for log files. The default 'php' allows for

| protecting the log files via basic scripting, when they are to be stored

| under a publicly accessible directory.

|

| Note: Leaving it blank will default to 'php'.

|

*/


```
$config['log_file_extension'] = '';
```

```
/*
```

```
|-----
```

```
| Log File Permissions
```

```
|-----
```

```
|
```

```
| The file system permissions to be applied on newly created log files.
```

```
|
```

```
| IMPORTANT: This MUST be an integer (no quotes) and you MUST use octal
```

```
| integer notation (i.e. 0700, 0644, etc.)
```

```
*/
```

```
$config['log_file_permissions'] = 0644;
```

```
/*
```

```
|-----
```

```
| Date Format for Logs
```

```
|-----
```

```
|
```

```
| Each item that is logged has an associated date. You can use PHP date
```

```
| codes to set your own date formatting
```

```
|
```

```
*/
```

```
$config['log_date_format'] = 'Y-m-d H:i:s';
```

```
/*
```

```
|-----
```

```
| Error Views Directory Path
```

```
|-----
```

```
|
| Leave this BLANK unless you would like to set something other than the default
| application/views/errors/ directory. Use a full server path with trailing slash.
|
|
*/
$config['error_views_path'] = '';
```

```
/*
|-----
| Cache Directory Path
|-----
|
| Leave this BLANK unless you would like to set something other than the default
| application/cache/ directory. Use a full server path with trailing slash.
|
|
*/
$config['cache_path'] = '';
```

```
/*
|-----
| Cache Include Query String
|-----
|
| Whether to take the URL query string into consideration when generating
| output cache files. Valid options are:
|
| FALSE = Disabled
| TRUE  = Enabled, take all query parameters into account.
|
| Please be aware that this may result in numerous cache
```

```

|             files generated for the same page over and over again.
|             array('q') = Enabled, but only take into account the specified list
|             of query parameters.
|
|
*/
$config['cache_query_string'] = FALSE;

```

```

/*
|-----
| Encryption Key
|-----
|
| If you use the Encryption class, you must set an encryption key.
| See the user guide for more info.
|
| https://codeigniter.com/userguide3/libraries/encryption.html
|
*/
$config['encryption_key'] = "";

```

```

/*
|-----
| Session Variables
|-----
|
| 'sess_driver'
|
|
|             The storage driver to use: files, database, redis, memcached
|

```

| 'sess_cookie_name'

|

| The session cookie name, must contain only [0-9a-z_-] characters

|

| 'sess_samesite'

|

| Session cookie SameSite attribute: Lax (default), Strict or None

|

| 'sess_expiration'

|

| The number of SECONDS you want the session to last.

| Setting to 0 (zero) means expire when the browser is closed.

|

| 'sess_save_path'

|

| The location to save sessions to, driver dependent.

|

| For the 'files' driver, it's a path to a writable directory.

| WARNING: Only absolute paths are supported!

|

| For the 'database' driver, it's a table name.

| Please read up the manual for the format with other session drivers.

|

| IMPORTANT: You are REQUIRED to set a valid save path!

|

| 'sess_match_ip'

|

| Whether to match the user's IP address when reading the session data.

|

| WARNING: If you're using the database driver, don't forget to update
| your session table's PRIMARY KEY when changing this setting.

| 'sess_time_to_update'

| How many seconds between CI regenerating the session ID.

| 'sess_regenerate_destroy'

| Whether to destroy session data associated with the old session ID
| when auto-regenerating the session ID. When set to FALSE, the data
| will be later deleted by the garbage collector.

| Other session cookie settings are shared with the rest of the application,
| except for 'cookie_prefix' and 'cookie_httponly', which are ignored here.

| */

\$config['sess_driver'] = 'files';

\$config['sess_cookie_name'] = 'ci_session';

\$config['sess_samesite'] = 'Lax';

\$config['sess_expiration'] = 7200;

\$config['sess_save_path'] = NULL;

\$config['sess_match_ip'] = FALSE;

\$config['sess_time_to_update'] = 300;

\$config['sess_regenerate_destroy'] = FALSE;

/*

|-----

| Cookie Related Variables

```

|-----
|
| 'cookie_prefix' = Set a cookie name prefix if you need to avoid collisions
| 'cookie_domain' = Set to .your-domain.com for site-wide cookies
| 'cookie_path'   = Typically will be a forward slash
| 'cookie_secure' = Cookie will only be set if a secure HTTPS connection exists.
| 'cookie_httponly' = Cookie will only be accessible via HTTP(S) (no javascript)
| 'cookie_samesite' = Cookie's samesite attribute (Lax, Strict or None)
|
| Note: These settings (with the exception of 'cookie_prefix' and
|       'cookie_httponly') will also affect sessions.
|
| */
$config['cookie_prefix']  = '';
$config['cookie_domain']  = '';
$config['cookie_path']    = '/';
$config['cookie_secure']  = FALSE;
$config['cookie_httponly'] = FALSE;
$config['cookie_samesite'] = 'Lax';

```

```

/*
|-----
| Standardize newlines
|-----
|
| Determines whether to standardize newline characters in input data,
| meaning to replace \r\n, \r, \n occurrences with the PHP_EOL value.
|
| WARNING: This feature is DEPRECATED and currently available only

```

```

|      for backwards compatibility purposes!
|
*/
$config['standardize_newlines'] = FALSE;

/*
|-----
| Global XSS Filtering
|-----
|
| Determines whether the XSS filter is always active when GET, POST or
| COOKIE data is encountered
|
| WARNING: This feature is DEPRECATED and currently available only
|      for backwards compatibility purposes!
|
*/
$config['global_xss_filtering'] = FALSE;

/*
|-----
| Cross Site Request Forgery
|-----
|
| Enables a CSRF cookie token to be set. When set to TRUE, token will be
| checked on a submitted form. If you are accepting user data, it is strongly
| recommended CSRF protection be enabled.
|
| 'csrf_token_name' = The token name
| 'csrf_cookie_name' = The cookie name

```

```

| 'csrf_expire' = The number in seconds the token should expire.
| 'csrf_regenerate' = Regenerate token on every submission
| 'csrf_exclude_uris' = Array of URIs which ignore CSRF checks
*/

$config['csrf_protection'] = FALSE;
$config['csrf_token_name'] = 'csrf_test_name';
$config['csrf_cookie_name'] = 'csrf_cookie_name';
$config['csrf_expire'] = 7200;
$config['csrf_regenerate'] = TRUE;
$config['csrf_exclude_uris'] = array();

/*
|-----
| Output Compression
|-----
|
| Enables Gzip output compression for faster page loads.  When enabled,
| the output class will test whether your server supports Gzip.
| Even if it does, however, not all browsers support compression
| so enable only if you are reasonably sure your visitors can handle it.
|
| Only used if zlib.output_compression is turned off in your php.ini.
| Please do not use it together with httpd-level output compression.
|
| VERY IMPORTANT:  If you are getting a blank page when compression is enabled it
| means you are prematurely outputting something to your browser.  It could
| even be a line of whitespace at the end of one of your scripts.  For
| compression to work, nothing can be sent before the output buffer is called
| by the output class.  Do not 'echo' any values with compression enabled.

```



```
|  
*/  
$config['compress_output'] = FALSE;  
  
/*  
|-----  
| Master Time Reference  
|-----  
|  
| Options are 'local' or any PHP supported timezone. This preference tells  
| the system whether to use your server's local time as the master 'now'  
| reference, or convert it to the configured one timezone. See the 'date  
| helper' page of the user guide for information regarding date handling.  
|  
*/  
$config['time_reference'] = 'local';  
  
/*  
|-----  
| Rewrite PHP Short Tags  
|-----  
|  
| If your PHP installation does not have short tag support enabled CI  
| can rewrite the tags on-the-fly, enabling you to utilize that syntax  
| in your view files. Options are TRUE or FALSE (boolean)  
|  
| Note: You need to have eval() enabled for this to work.  
|  
*/
```

```
$config['rewrite_short_tags'] = FALSE;
```

```
/*
```

```
|-----
```

```
| Reverse Proxy IPs
```

```
|-----
```

```
|
```

```
| If your server is behind a reverse proxy, you must whitelist the proxy
```

```
| IP addresses from which CodeIgniter should trust headers such as
```

```
| HTTP_X_FORWARDED_FOR and HTTP_CLIENT_IP in order to properly identify
```

```
| the visitor's IP address.
```

```
|
```

```
| You can use both an array or a comma-separated list of proxy addresses,
```

```
| as well as specifying whole subnets. Here are a few examples:
```

```
|
```

```
| Comma-separated: '10.0.1.200,192.168.5.0/24'
```

```
| Array:          array('10.0.1.200', '192.168.5.0/24')
```

```
*/
```

```
$config['proxy_ips'] = '';
```

Database.php

```
<?php
```

```
defined('BASEPATH') or exit('No direct script access allowed');
```

```
/*
```

```
|-----
```

```
| DATABASE CONNECTIVITY SETTINGS
```

```
|-----
```

```
| This file will contain the settings needed to access your database.
```

|

| For complete instructions please consult the 'Database Connection'

| page of the User Guide.

| -----

| EXPLANATION OF VARIABLES

| -----

|

| ['dsn'] The full DSN string describe a connection to the database.

| ['hostname'] The hostname of your database server.

| ['username'] The username used to connect to the database

| ['password'] The password used to connect to the database

| ['database'] The name of the database you want to connect to

| ['dbdriver'] The database driver. e.g.: mysqli.

| Currently supported:

| cubrid, ibase, mssql, mysql, mysqli, oci8,

| odbc, pdo, postgre, sqlite, sqlite3, sqlsrv

| ['dbprefix'] You can add an optional prefix, which will be added

| to the table name when using the Query Builder class

| ['pconnect'] TRUE/FALSE - Whether to use a persistent connection

| ['db_debug'] TRUE/FALSE - Whether database errors should be displayed.

| ['cache_on'] TRUE/FALSE - Enables/disables query caching

| ['cachedir'] The path to the folder where cache files should be stored

| ['char_set'] The character set used in communicating with the database

| ['dbcollat'] The character collation used in communicating with the database

| NOTE: For MySQL and MySQLi databases, this setting is only used

| as a backup if your server is running PHP < 5.2.3 or MySQL < 5.0.7

| (and in table creation queries made with DB Forge).

	There is an incompatibility in PHP with <code>mysql_real_escape_string()</code>
which	
	can make your site vulnerable to SQL injection if you are using a
	multi-byte character set and are running versions lower than these.
	Sites using Latin-1 or UTF-8 database character set and collation are
unaffected.	
	<code>['swap_pre']</code> A default table prefix that should be swapped with the dbprefix
	<code>['encrypt']</code> Whether or not to use an encrypted connection.
	<code>'mysql'</code> (deprecated), <code>'sqlsrv'</code> and <code>'pdo/sqlsrv'</code> drivers accept TRUE/FALSE
	<code>'mysqli'</code> and <code>'pdo/mysql'</code> drivers accept an array with the following options:
	<code>'ssl_key'</code> - Path to the private key file
	<code>'ssl_cert'</code> - Path to the public key certificate file
	<code>'ssl_ca'</code> - Path to the certificate authority file
	<code>'ssl_capath'</code> - Path to a directory containing trusted CA certificates in
PEM format	
	<code>'ssl_cipher'</code> - List of *allowed* ciphers to be used for the encryption,
separated by colons (':')	
	<code>'ssl_verify'</code> - TRUE/FALSE; Whether verify the server certificate or not
	<code>['compress']</code> Whether or not to use client compression (MySQL only)
	<code>['stricton']</code> TRUE/FALSE - forces 'Strict Mode' connections
	- good for ensuring strict SQL while developing
	<code>['ssl_options']</code> Used to set various SSL options that can be used when making SSL
connections.	
	<code>['failover']</code> array - A array with 0 or more data for connections if the main should fail.
	<code>['save_queries']</code> TRUE/FALSE - Whether to "save" all executed queries.
	NOTE: Disabling this will also effectively disable both
	<code>\$this->db->last_query()</code> and profiling of DB queries.

| When you run a query, with this setting set to TRUE (default),
 | CodeIgniter will store the SQL statement for debugging purposes.
 | However, this may cause high memory usage, especially if you run
 | a lot of SQL queries ... disable this to avoid that problem.

| The \$active_group variable lets you choose which connection group to
 | make active. By default there is only one group (the 'default' group).

| The \$query_builder variables lets you determine whether or not to load
 | the query builder class.

*/

\$active_group = 'default';

\$query_builder = TRUE;

```
$db['default'] = array(
    'dsn' => "",
    'hostname' => 'localhost',
    'username' => 'root',
    'password' => "",
    'database' => 'db_ngekos',
    'dbdriver' => 'mysqli',
    'dbprefix' => "",
    'pconnect' => FALSE,
    'db_debug' => (ENVIRONMENT !== 'production'),
    'cache_on' => FALSE,
    'cachedir' => "",
    'char_set' => 'utf8',
    'dbcollat' => 'utf8_general_ci',
    'swap_pre' => "",
```

```

        'encrypt' => FALSE,
        'compress' => FALSE,
        'stricton' => FALSE,
        'failover' => array(),
        'save_queries' => TRUE
    );
Auth.php
<?php
defined('BASEPATH') or exit('No direct script access allowed');

class Auth extends CI_Controller
{
    public function __construct()
    {
        parent::__construct();
        $this->load->library('form_validation');
    }

    public function goToDefaultPage()
    {
        if ($this->session->userdata('role_id') == 1) {
            redirect('admin');
        } else if ($this->session->userdata('role_id') == 2) {
            redirect('user/home');
        } else {
            // jika ada role_id yg lain maka tambahkan disini
        }
    }
}

```

```

public function index()
{
    $this->goToDefaultPage();

    $this->form_validation->set_rules('email', 'Email', 'trim|required|valid_email', [
        'required' => 'Kolom tidak boleh kosong', 'valid_email' => 'Format email salah'
    ]);

    $this->form_validation->set_rules('password', 'Password', 'trim|required|min_length[6]', [
        'required' => 'Kolom tidak boleh kosong', 'min_length' => 'Minimal 6 karakter'
    ]);

    if ($this->form_validation->run() == false) {

        $data['title'] = 'Halaman login | Ngekosyuk';
        $this->load->view('templates/auth_header', $data);
        $this->load->view('auth/login');
        $this->load->view('templates/auth_footer');
    } else {
        // validasi sukses

        $this->_login();
    }
}

private function _login()
{
    $email = $this->input->post('email');
    $password = $this->input->post('password');

    $user = $this->db->get_where('user', ['email' => $email])->row_array();

```

```

//jika usernya terdaftar
if ($user) {
    //jika usernya aktif
    if ($user['is_active'] == 1) {
        //jika passwordnya benar
        if (md5($password, $user['password'])) {
            $data = [
                'email' => $user['email'], 'role_id' => $user['role_id'], 'id' => $user['id']
            ];
            $this->session->set_userdata($data);
            if ($data['role_id'] == 1) {
                redirect('admin');
            } else {
                redirect('user/home');
            }
        } else {
            //jika passwordnya salah
            $this->session->set_flashdata('message', '<div class="alert alert-danger"
role="alert">Password tidak valid</div>');
            redirect('auth');
        }
    } else {
        $this->session->set_flashdata('message', '<div class="alert alert-danger" role="alert">Email
belum diverifikasi, silahkan cek email anda untuk verifikasi</div>');
        redirect('auth');
    }
} else {
    $this->session->set_flashdata('message', '<div class="alert alert-danger" role="alert">Email
belum terdaftar</div>');
    redirect('auth');
}

```



```

    }
}

public function pendaftaran()
{
    $this->goToDefaultPage();

    $this->form_validation->set_rules('nama', 'Nama', 'required|trim', [
        'required' => 'Kolom tidak boleh kosong'
    ]);

    $this->form_validation->set_rules('email', 'Email',
    'required|trim|valid_email|is_unique[user.email]', [
        'valid_email' => 'Format email salah', 'required' => 'Kolom tidak boleh kosong', 'is_unique' =>
        'Email ini sudah terdaftar'
    ]);

    $this->form_validation->set_rules('password1', 'Password',
    'required|trim|min_length[6]|matches[password2]', [
        'matches' => 'Password tidak sama', 'min_length' => 'Minimal 6 karakter', 'required' => 'Kolom
        tidak boleh kosong'
    ]);

    $this->form_validation->set_rules('password2', 'Password', 'required|trim|matches[password1]');

    if ($this->form_validation->run() == false) {
        $data['title'] = 'Registrasi | Ngekosyuk';
        $this->load->view('templates/auth_header', $data);
        $this->load->view('auth/pendaftaran');
        $this->load->view('templates/auth_footer');
    } else {
        $data = [
            'name' => htmlspecialchars($this->input->post('nama', true)),

```

```

        'email' => htmlspecialchars($this->input->post('email', true)),
        'image' => 'default.png',
        'password' => password_hash($this->input->post('password1'), PASSWORD_DEFAULT),
        'role_id' => 2,
        'is_active' => 1,
        'date_created' => time()
    ];

    $this->db->insert('user', $data);

    $this->session->set_flashdata('message', '<div class="alert alert-success" role="alert">Selamat,
email kamu berhasil terdaftar!</div>');
    redirect('auth');
}
}

public function logout()
{
    $this->session->unset_userdata('email');
    $this->session->unset_userdata('role_id');
    $this->session->unset_userdata('id');

    $this->session->set_flashdata('message', '<div class="alert alert-success" role="alert">Akun berhasil
logout</div>');
    redirect('auth');
}

public function blocked()
{
    $this->load->view('auth/blocked');
}

```

}

}